


Ocloc™ AW

Ocloc trellis post 150mm wire hole spacings Galvanneal protected. Available in **VSP** and **TWS**.


Length available in: Number of wire holes:

- 1.8m = 6 feet 6 holes
- 2.1m = 7 feet 9 holes
- 2.4m = 8 feet 10 holes
- 2.7m = 9 feet 10 holes

Thickness of materials: 2.4mm

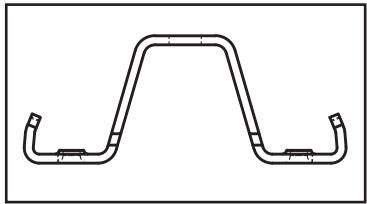


Ocloc AW Profile



150mm wire hole spacings

- KEY**
- 400mm Recommended insertion depth
 - - - 500mm
 - - - 600mm
- VSP** = Vertical Shoot Positioning
TWS = Two (Three) Wires Simple
 GL = Ground Level
 D = Dripper hole

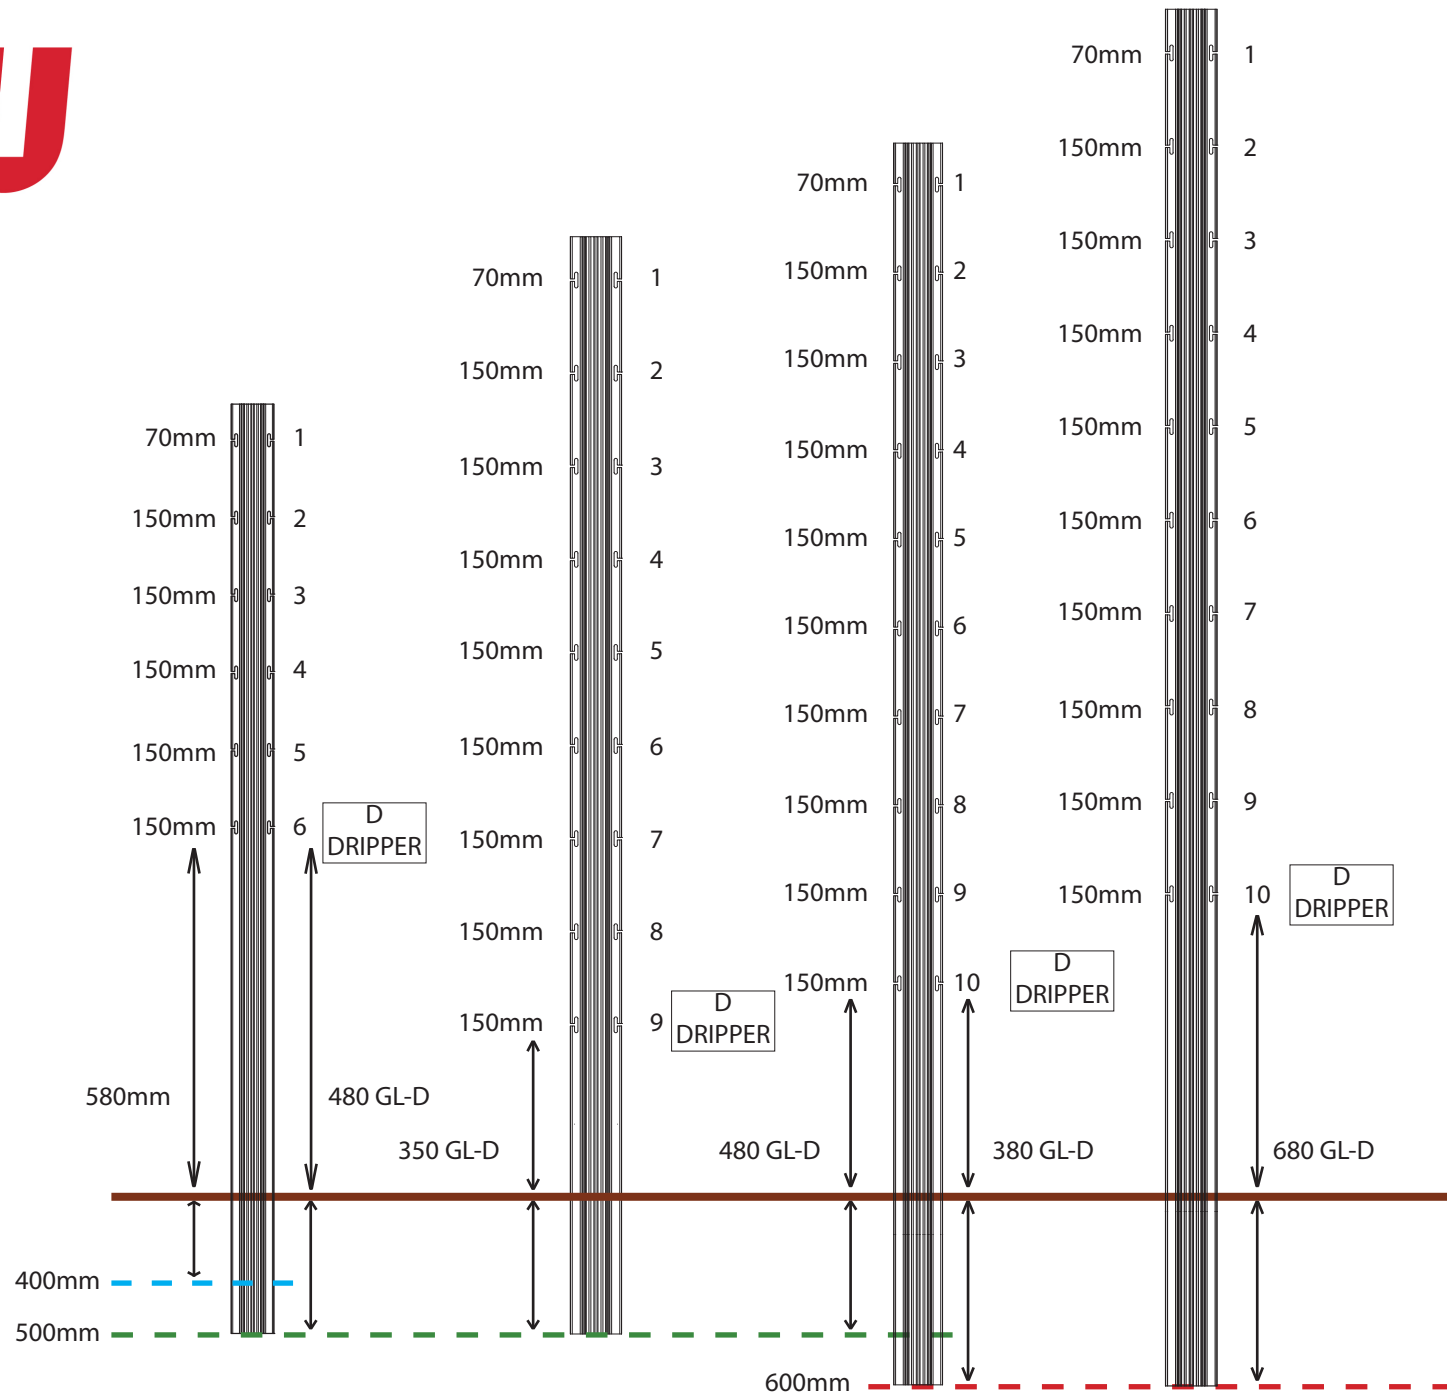

Length		1.8m = 6 feet	2.1m = 7 feet	2.4m = 8 feet	2.7m = 9 feet
Ordering Codes	TWS	W1.8TWS-150	W2.1TWS-150	W2.4TWS-150	W2.7TWS-150
	VSP	W1.8VSP-150	W2.1VSP-150	W2.4VSP-150	W2.7VSP-150