



## Total Trellis System

Manufactured in Australia

- **Ocloc TB** is a narrow post - **50mm wide**
- **1.8mm thick G450 High tensile steel** for strength.
- **GALFAN Coated** for durability - 5% Aluminium, Rare Metals, 95% Zinc, the ultimate in corrosive resistant coating
- **Unique profile** to enhance strength and in ground rigidity
- Quick and easy to install, no staples
- **Australian designed, made and owned**



*Ocloc products are carbon neutral — 100% carbon offset —*



For further details please contact


**Ocvitti Australia**  
Nigel Catt 0418 832 967  
Visit us at [www.ocloc.com.au](http://www.ocloc.com.au)

[admin@ocloc.com.au](mailto:admin@ocloc.com.au)  
[nigel@ocloc.com.au](mailto:nigel@ocloc.com.au)




# Ocloc™ TB

## 50mm Wide / Narrow Trellis Post VSP - Vertical Shoot Positioning

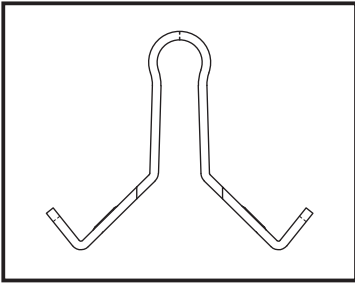


Ocloc TB profile

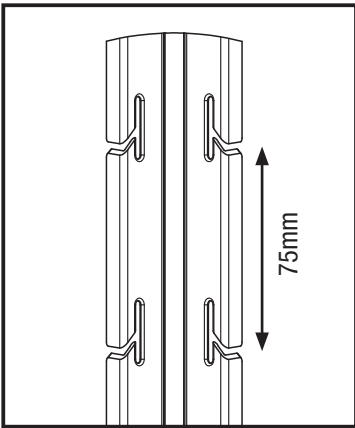

Ocloc TB - 75mm wire hole spacings.

Rows: 1m - 1.5m wide

Cordon Wire: 400 - 500mm high

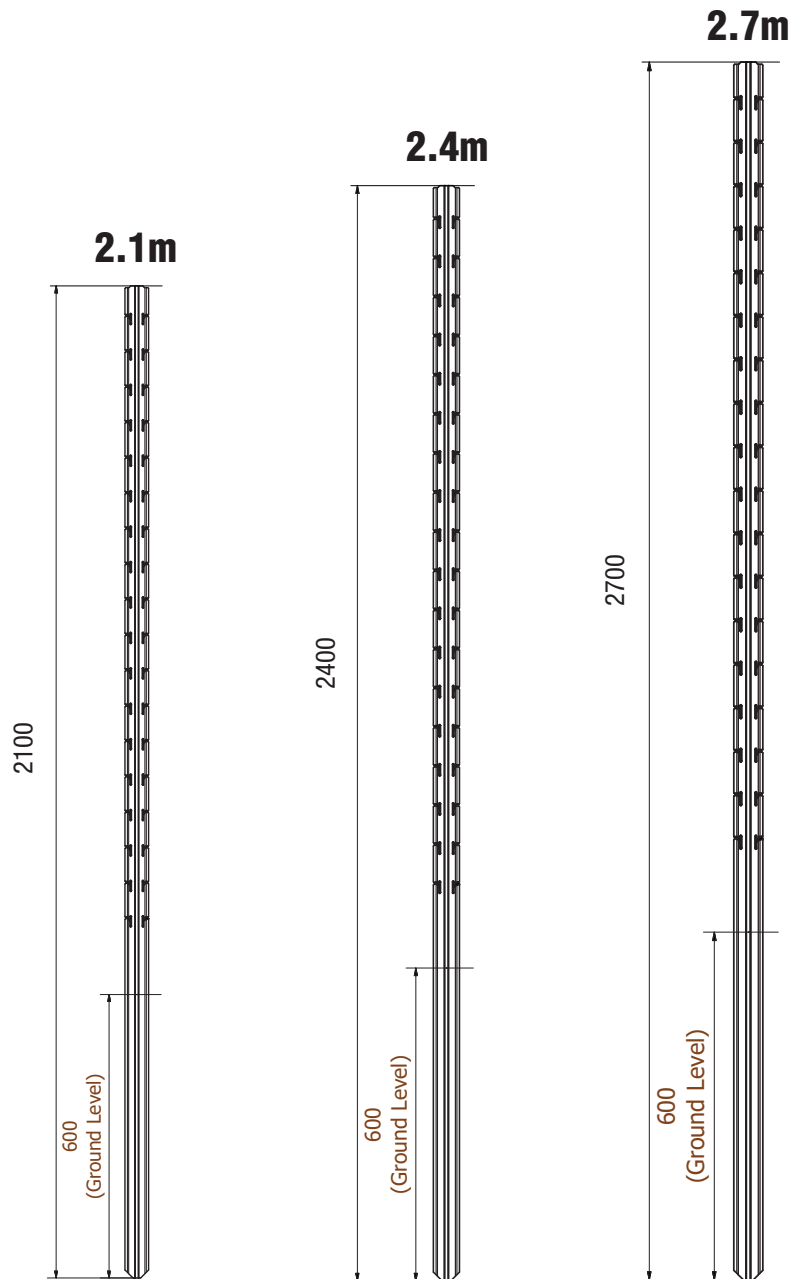

Lengths of <b>Ocloc TB</b>	2.1	2.4	2.7
Wire hole numbers at spacings 75mm	18	20	22

*Ocloc products are carbon neutral — 100% carbon offset —*



For further details please contact

**Ocvitti Australia**  
Nigel Catt 0418 832 967  
Visit us at [www.ocloc.com.au](http://www.ocloc.com.au)

[admin@ocloc.com.au](mailto:admin@ocloc.com.au)  
[nigel@ocloc.com.au](mailto:nigel@ocloc.com.au)

