


Ocloc™ TS

Ocloc TS Tree Stakes


Available in 1.2, 1.5 and 1.8

Ocloc TS post 150mm wire hole spacings.


- easy to install
- wire holes are rounded to reduce abrasion on wire or string
- wire hole spacing 150mm intervals
- easy/quick wire insertion
- high tensile
- galfan coated metal (www.galfan.com)
- available in 1.55 thickness
- 1.8 thickness
- width of the post is 75mm
- posts support maximum fruit loads
- can be removed at the end of the season for reuse using the Ocloc post puller
- can also be hand rammed with a manual post rammer (dolly)
- ramming heads can be provided for petrol or tractor ramming

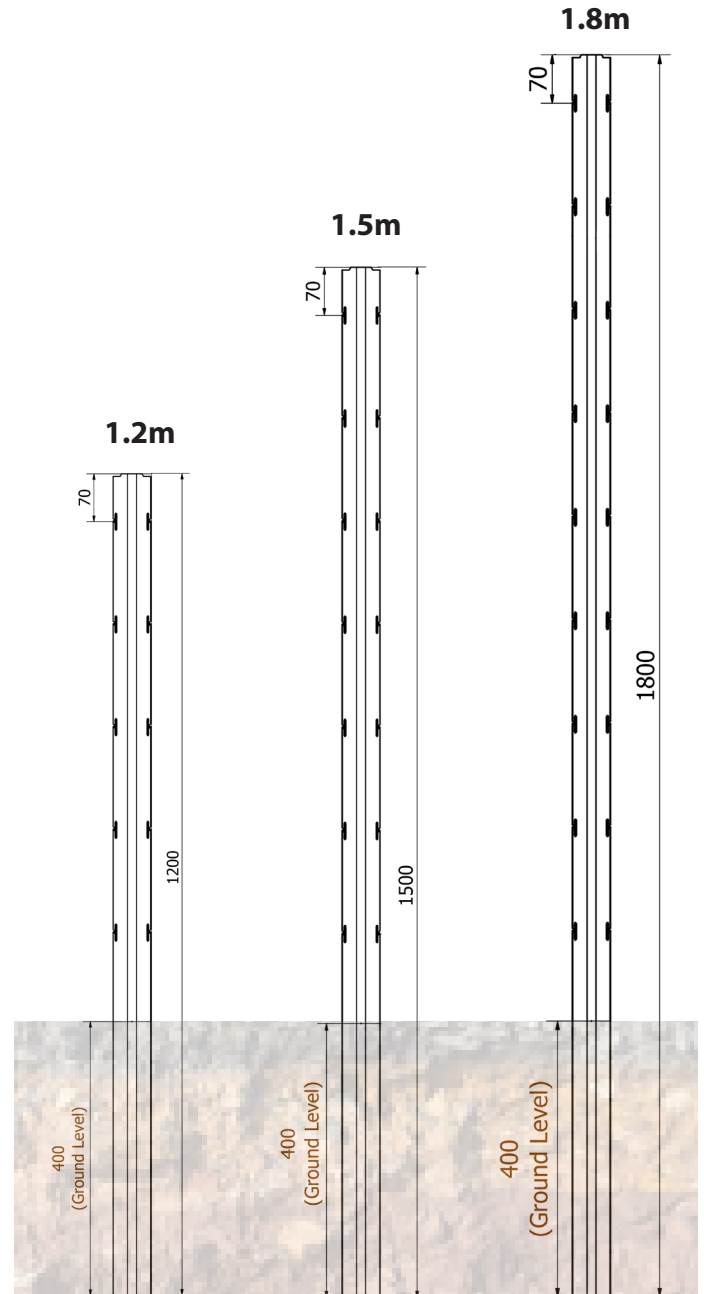


Length	1.2	1.5	1.8
Wire Hole Numbers at spacings 150mm	5	7	9
Ordering Codes			



Ocloc TS open profile

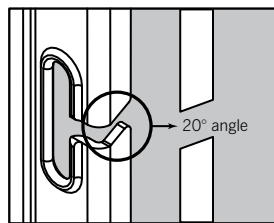

VSP 20° angle for wire lifting

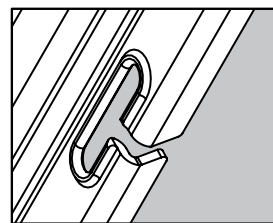

Rounded wire holes to reduce abrasion



If there is a feature you need to vary on this product, such as depth, insertion, or hole quantities, please send us your drawings.

Ocloc products are carbon neutral — 100% carbon offset — Australian designed and made

Nigel Catt | Email: nigel@ocloc.com.au | Phone: 0418 832 967

www.ocloc.com.au

