



### OKY Post / Picket

**Function:** Live stock, exclusion and conservation. Barb wire fencing, lane ways and boundaries.

**Material:** High tensile steel, with flex and return for wildlife or stock impact

**Coating:** GALFAN Coating 5% Aluminium, Rare Metals, Magnesium, 95% Zinc, the ultimate in corrosive resistant coating

**Thickness:** 1.8mm thick

**Width:** 63mm wide post/picket

**Length:** 1.65m (5.4ft), 1.8m (6ft), 2.1m (7ft), 2.4m (8ft)

**Insert Depth Options:** 585mm, 735mm

**Wire Holes:** Available in 75mm wire hole spacings, suitable for multiple mesh spacing

**Special Features:**

- Easy to load wire slots for twitching - 300mm x 2.5mm thick
- Internal wire slots are rounded to reduce wire wear
- The profile enhances strength and rigidity in the ground
- **Designed and manufactured in Australia**



*OK products are carbon offset at manufacturing — Australian designed & manufactured*



Sales Enquiries: +61 (0) 488 662 562 | Nigel Catt: nigel@ocloc.com.au

[www.OCAG.com.au](http://www.OCAG.com.au)

# OCAG OK

### Ocloc Kakadu OKY fence post/picket - 75mm wire slot spacings

**Function:** Stock control, laneways, internal & exclusion

**Coating:** GALFAN Coating - rare metals, aluminium, magnesium, zinc

**Wire Slots:** 75mm spacings - suits all mesh profiles + top wire/barb wire slot 17mm from the top (included in the tabled slot numbers)

**Material:** High tensile steel, with flex

**Thickness:** 1.8mm thick

**Width:** 63mm wide

**Length:** 1.65m (5.4ft), 1.8m (6ft), 2.1m (7ft), 2.4m (8ft)




**Insert Depth:** 585mm

**Twich Wire:** 2.5mm


**Strength:** High tensile steel




**585mm**  
Insert Depth

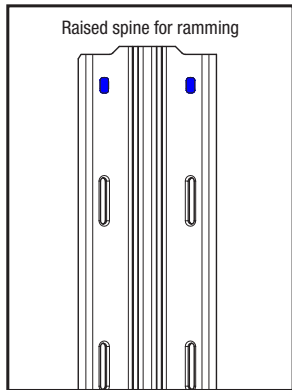

Ground level view bottom wire hole



Pointed tip for easy ramming

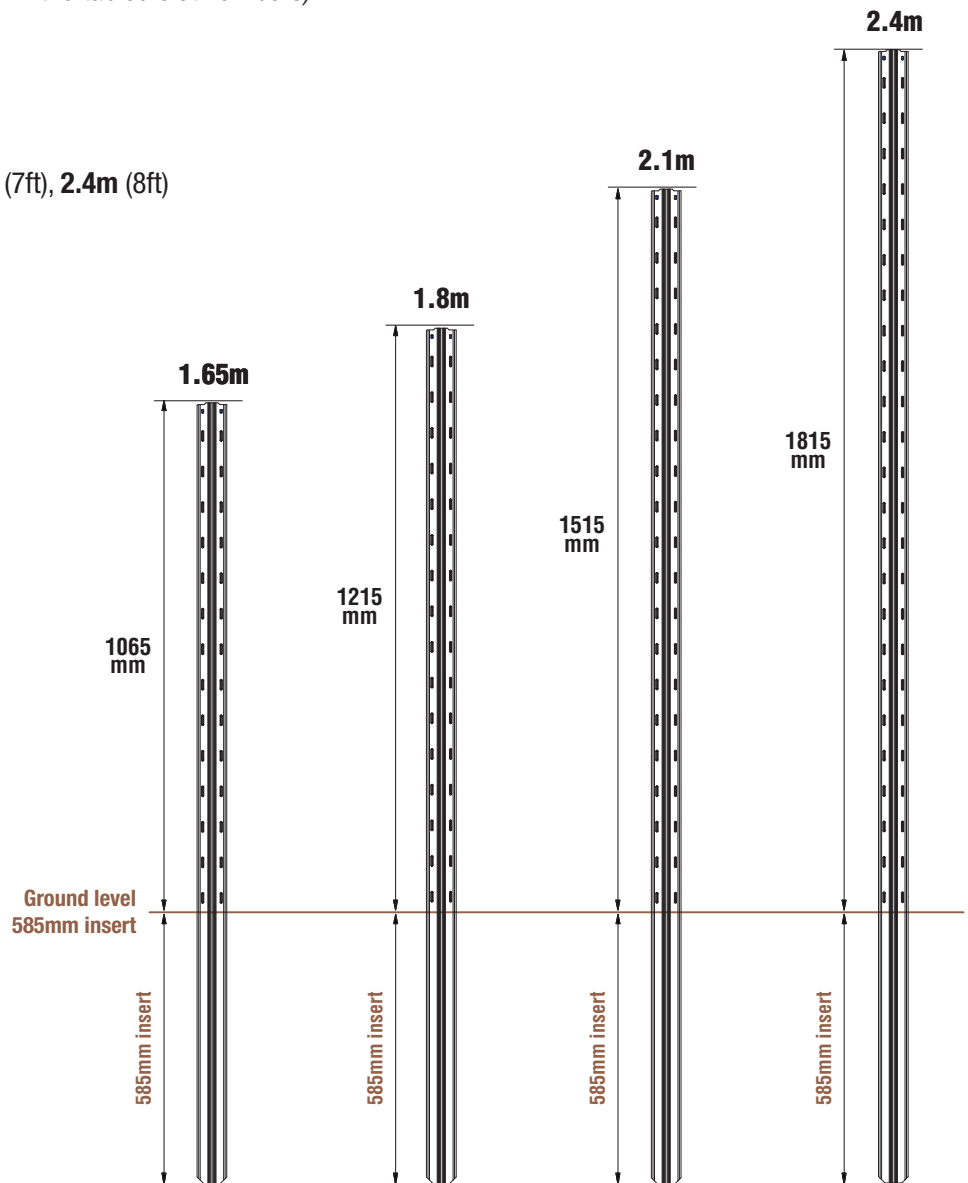

OKY order codes	OKB1.65(585)	OKB1.8(585)	OKB2.1(585)	OKB2.4(585)
OKY lengths	1.65m   5.4ft	1.8m   6ft	2.1m   7ft	2.4m   8ft
Wire hole numbers at spacings 75mm	15	17	21	25

OK products are carbon offset at manufacturing — Australian designed & manufactured



Sales Enquiries: +61 (0) 488 662 562 | Nigel Catt: nigel@ocloc.com.au

www.OCAG.com.au

**OCAG OK**

### Ocloc Kakadu OKY fence post/picket - 75mm wire slot spacings

**Function:** Stock control, laneways, internal & exclusion

**Coating:** GALFAN Coating - rare metals, aluminium, magnesium, zinc

**Wire Slots:** 75mm spacings - suits all mesh profiles + top wire/barb wire slot 17mm from the top (included in the tabled slot numbers)

**Material:** High tensile steel, with flex

**Thickness:** 1.8mm thick

**Width:** 63mm wide

**Length:** 2.1m (7ft), 2.4m (8ft)




**Insert Depth:** 735mm

**Twich Wire:** 2.5mm


**Strength:** High tensile steel




**735mm**  
Insert Depth

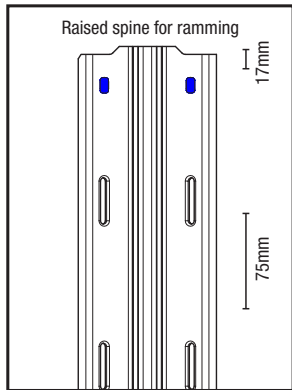

Ground level view bottom wire hole



Pointed tip for easy ramming

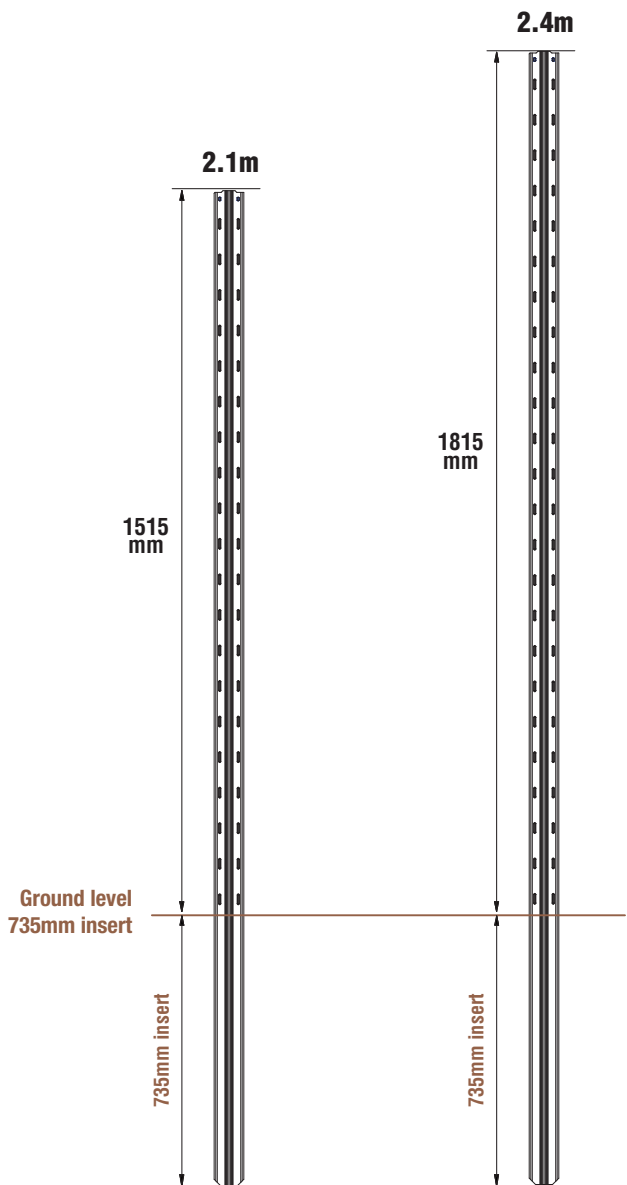

<b>OKY</b> order codes	OKB2.1(735)	OKB2.4(735)
<b>OKY</b> lengths	2.1m   7ft	2.4m   8ft
Wire hole numbers at spacings 75mm	21	25

OK products are carbon offset at manufacturing — Australian designed & manufactured



Sales Enquiries: +61 (0) 488 662 562 | Nigel Catt: nigel@ocloc.com.au

[www.OCAG.com.au](http://www.OCAG.com.au)

**OCAG OK**