

Ocloc Kakadu OKY fence post/picket - 75mm wire slot spacings

Function: Stock control, laneways, internal & exclusion

Coating: GALFAN Coating - rare metals, aluminium, magnesium, zinc

Wire Slots: 75mm spacings - suits all mesh profiles + top wire/barb wire slot 17mm from the top (included in the tabled slot numbers)

Material: High tensile steel, with flex

Thickness: 1.8mm thick


Width: 86mm wide

Length: 1.65m (5.4ft), 1.8m (6ft), 2.1m (7ft), 2.4m (8ft)




Insert Depth: 585mm

Twich Wire: 2.5mm



Strength: High tensile steel



585mm
Insert Depth

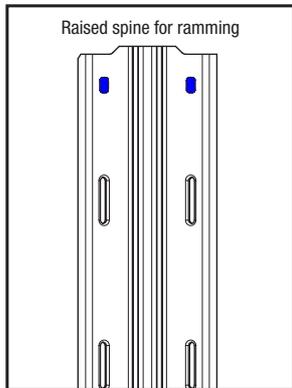

Ground level view bottom wire hole

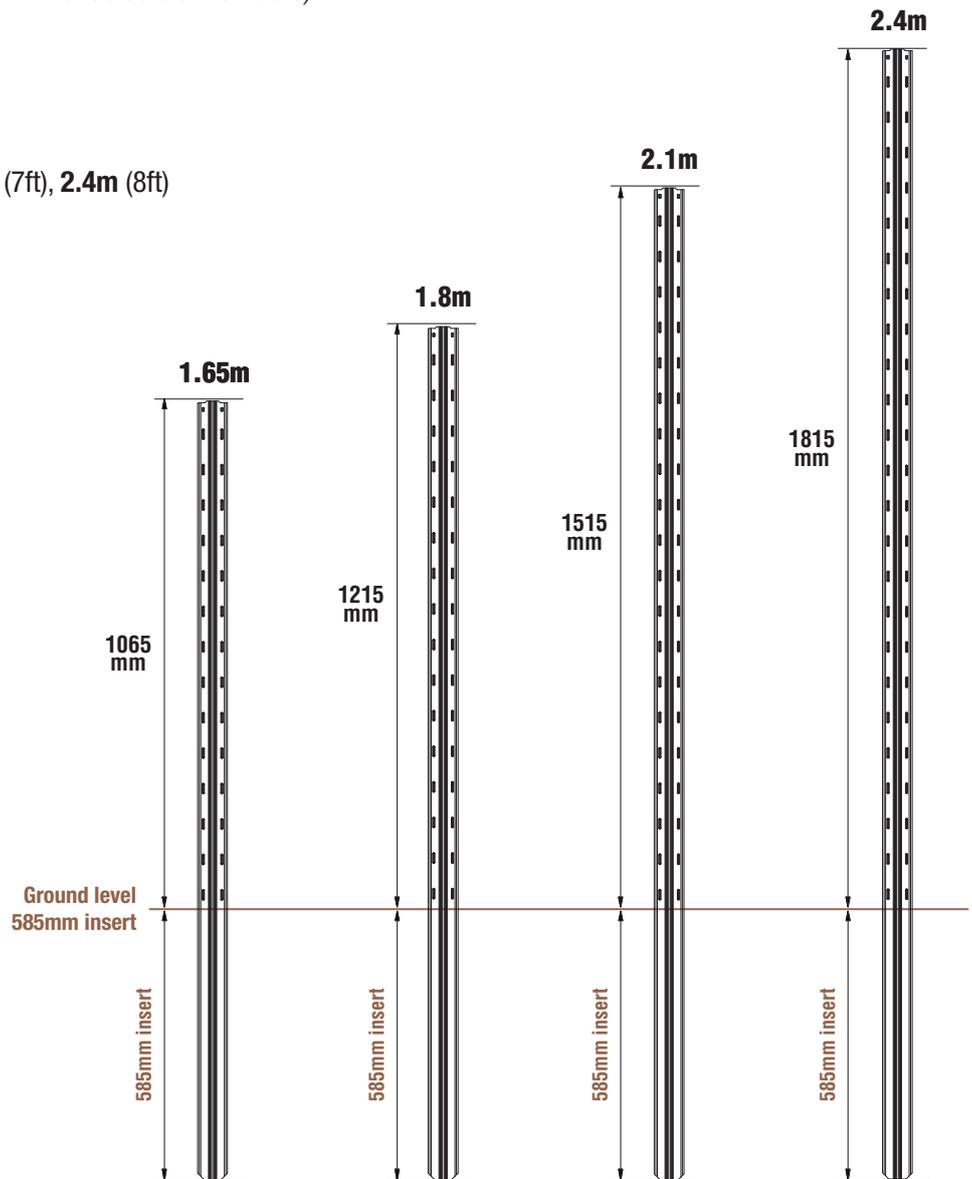

OKY order codes	OKB1.65(585)	OKB1.8(585)	OKB2.1(585)	OKB2.4(585)
OKY lengths	1.65m 5.4ft	1.8m 6ft	2.1m 7ft	2.4m 8ft
Wire hole numbers at spacings 75mm	15	17	21	25

OK products are carbon offset at manufacturing — Australian designed & manufactured



Sales Enquiries: +61 (0) 488 662 562 | Nigel Catt: nigel@ocloc.com.au

www.ocloc.com.au

Ocloc Kakadu OKY fence post/picket - 75mm wire slot spacings

Function: Stock control, laneways, internal & exclusion

Coating: GALFAN Coating - rare metals, aluminium, magnesium, zinc

Wire Slots: 75mm spacings - suits all mesh profiles + top wire/barb wire slot 17mm from the top (included in the tabled slot numbers)

Material: High tensile steel, with flex

Thickness: 1.8mm thick


Width: 86mm wide

Length: 2.1m (7ft), 2.4m (8ft)




Insert Depth: 735mm

Twich Wire: 2.5mm



Strength: High tensile steel



735mm
Insert Depth

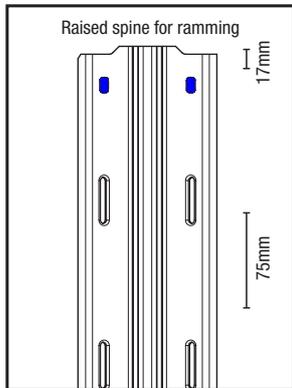

Ground level view bottom wire hole

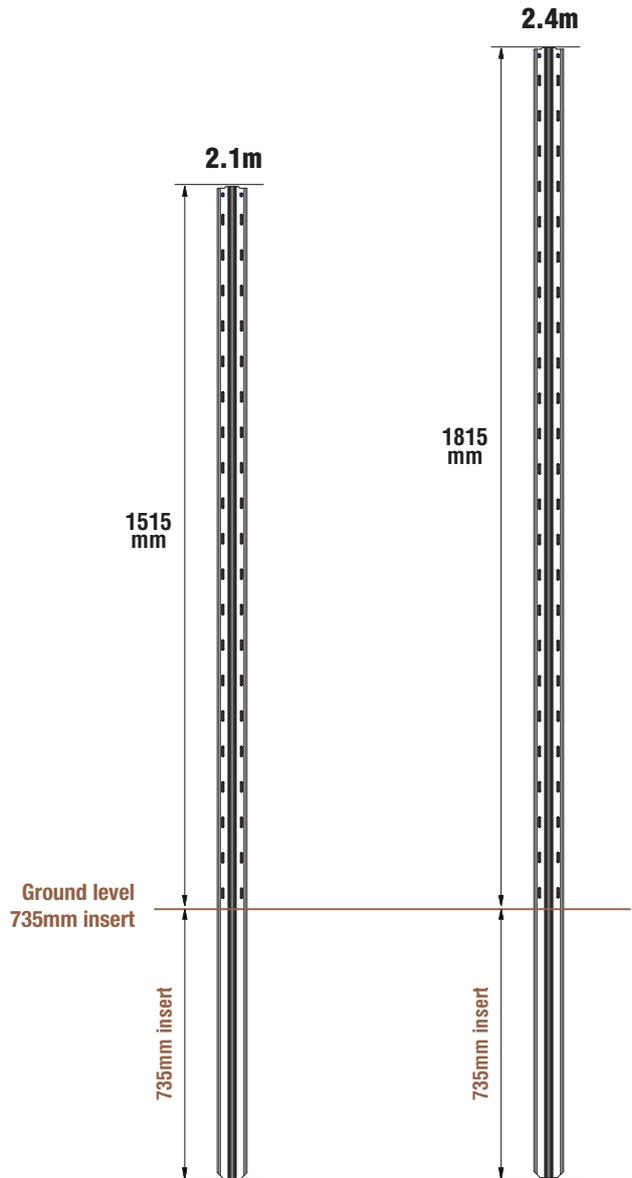

OKY order codes	OKB2.1(735)	OKB2.4(735)
OKY lengths	2.1m 7ft	2.4m 8ft
Wire hole numbers at spacings 75mm	21	25

OK products are carbon offset at manufacturing — Australian designed & manufactured



Sales Enquiries: +61 (0) 488 662 562 | Nigel Catt: nigel@ocloc.com.au

www.ocloc.com.au