



Stand Alone Strainer
Designed & Manufactured in Australia



Ocloc S - Station block Foley Wines Central Otago, Mt. Pisa.
Move away from CCA wood.

Ocloc S

Stand alone strainer for replacements and new developments

3mm thick high tensile steel

2.55m long

GALFAN Coating - rare metals, aluminium, zinc and magnesium.

The ultimate in corrosive resistant coating for durability

No need to pre drill

Ramming head available 90mm x 190mm



Ocloc products are carbon neutral at manufacturing — 100% carbon offset



www.ocloc.com.au

Ocloc Sales Enquiries
Nigel Catt - 0418 832 967
Administration

0488 662 562
nigel@ocloc.com.au
admin@ocloc.com.au





**New Development &
Replacement Strainer**
Designed & Manufactured in Australia



New development - Foley Wines, Central Otago, Mt. Pisa



Tamar Valley, Tasmania



Simple wire attachment

Ocloc products are carbon neutral at manufacturing — 100% carbon offset



www.ocloc.com.au

Ocloc Sales Enquiries
Nigel Catt - 0418 832 967
Administration

0488 662 562
nigel@ocloc.com.au
admin@ocloc.com.au





***New Development &
Replacement Strainer***
Designed & Manufactured in Australia



McLaren Vale, new development. Ocloc 2.4 Strainers



Ocloc products are carbon neutral at manufacturing — 100% carbon offset



www.ocloc.com.au

Ocloc Sales Enquiries
Nigel Catt - 0418 832 967
Administration

0488 662 562
nigel@ocloc.com.au
admin@ocloc.com.au




Ocloc S lengths: Available in 2200mm, 2400mm, 2550mm and 2700mm

Material: High tensile G450 steel


Thickness: 3 mm

Holes to attach wires, soft round 16mm. 80mm apart

2700mm - 14 holes

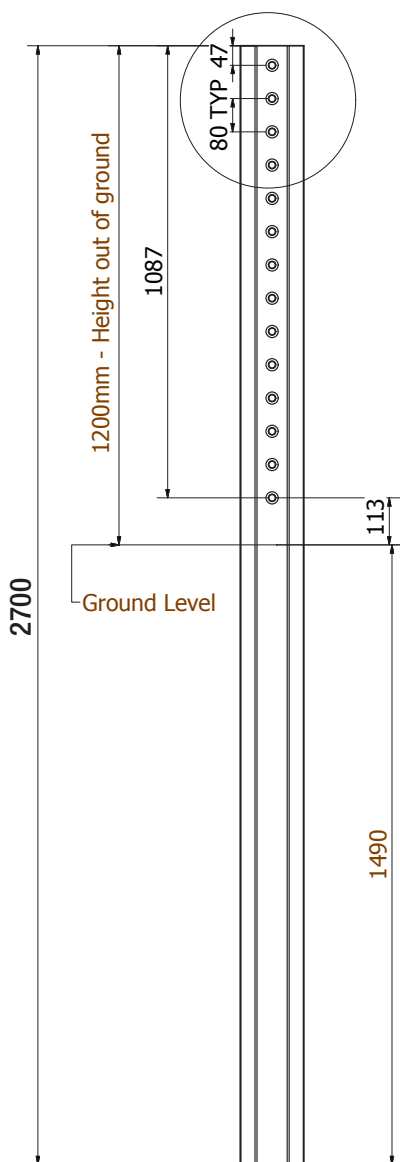

2400mm - 14 holes

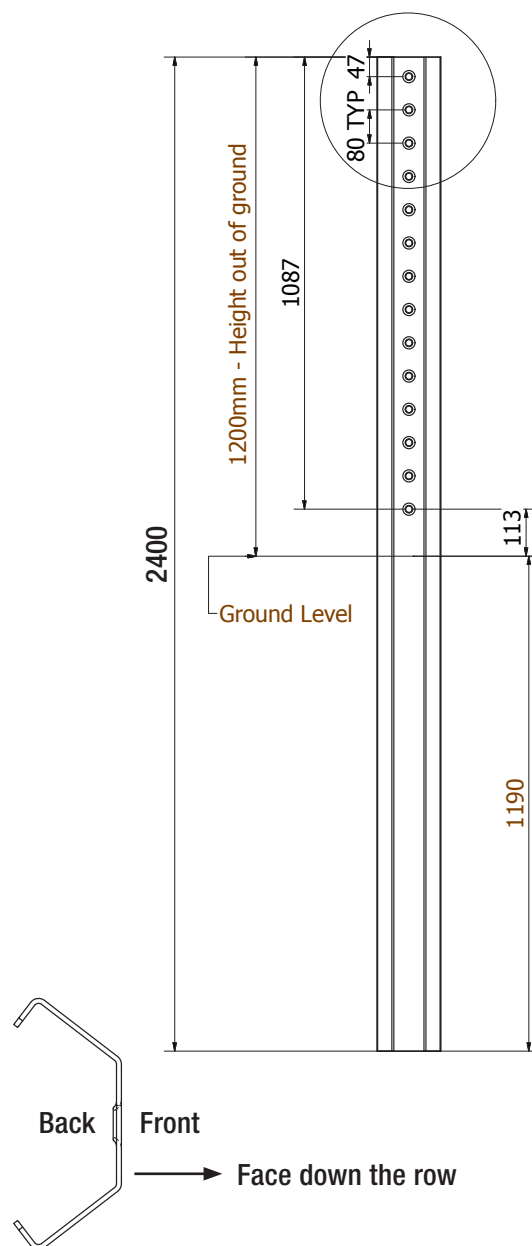

Ocloc products are carbon neutral at manufacturing — 100% carbon offset



Ocloc S lengths: Available in 2200mm, 2400mm


Material: High tensile G450 steel

Coating: Galfan


Thickness: 3 mm

Slots to attach wire, soft round 27mm x 12mm

2200mm - 8 wire slots

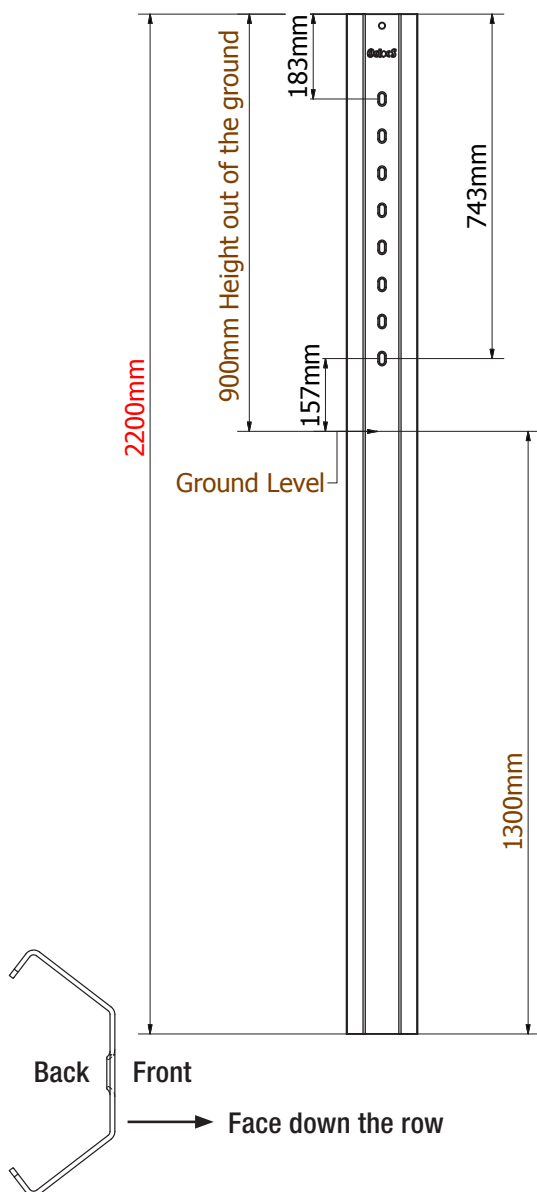

2400mm - 8 wire slots

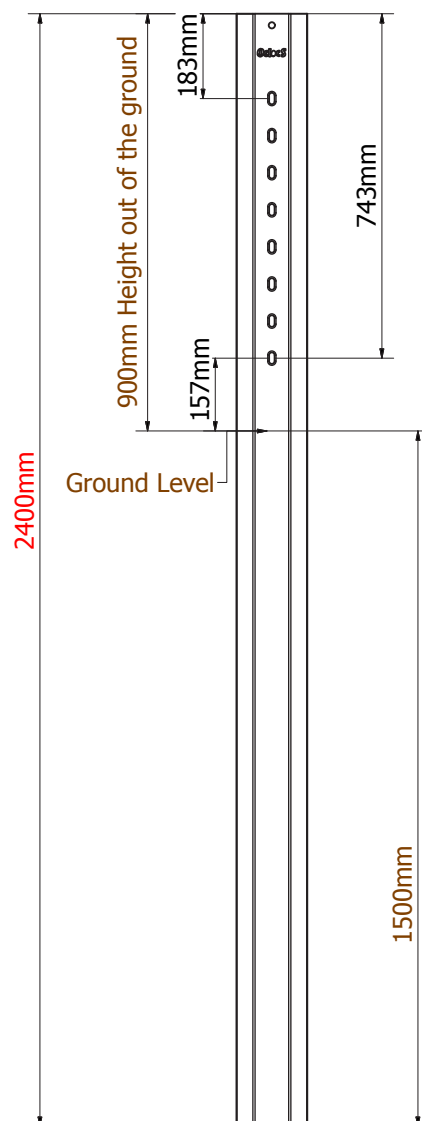

Ocloc products are carbon neutral at manufacturing — 100% carbon offset

