

Ocloc™ A


+ SPINE HOLES

Ocloc trellis post 75mm wire hole spacings
Galvanneal protected. Available in **VSP** and **TWS**.


Length available in: Number of wire holes:

1.8m = 6 feet	12 holes
2.1m = 7 feet	16 holes
2.4m = 8 feet	20 holes
2.7m = 9 feet	20 holes

Thickness of materials: 1.8mm

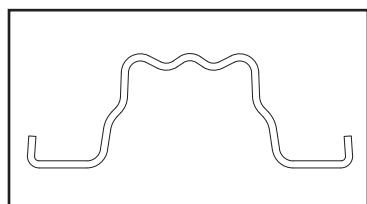

Ocloc A Profile

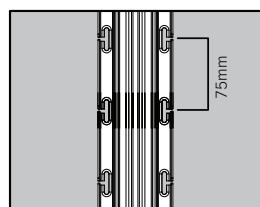


75mm wire hole spacings

KEY

- — — 400mm
 - - - 500mm
 - - - 600mm
 - 8.5mm screw hole for a shark tooth screw
- Recommended insertion depth

- VSP** = Vertical Shoot Positioning
- TWS** = Two (Three) Wires Simple
- GL = Ground Level
- D = Drripper hole

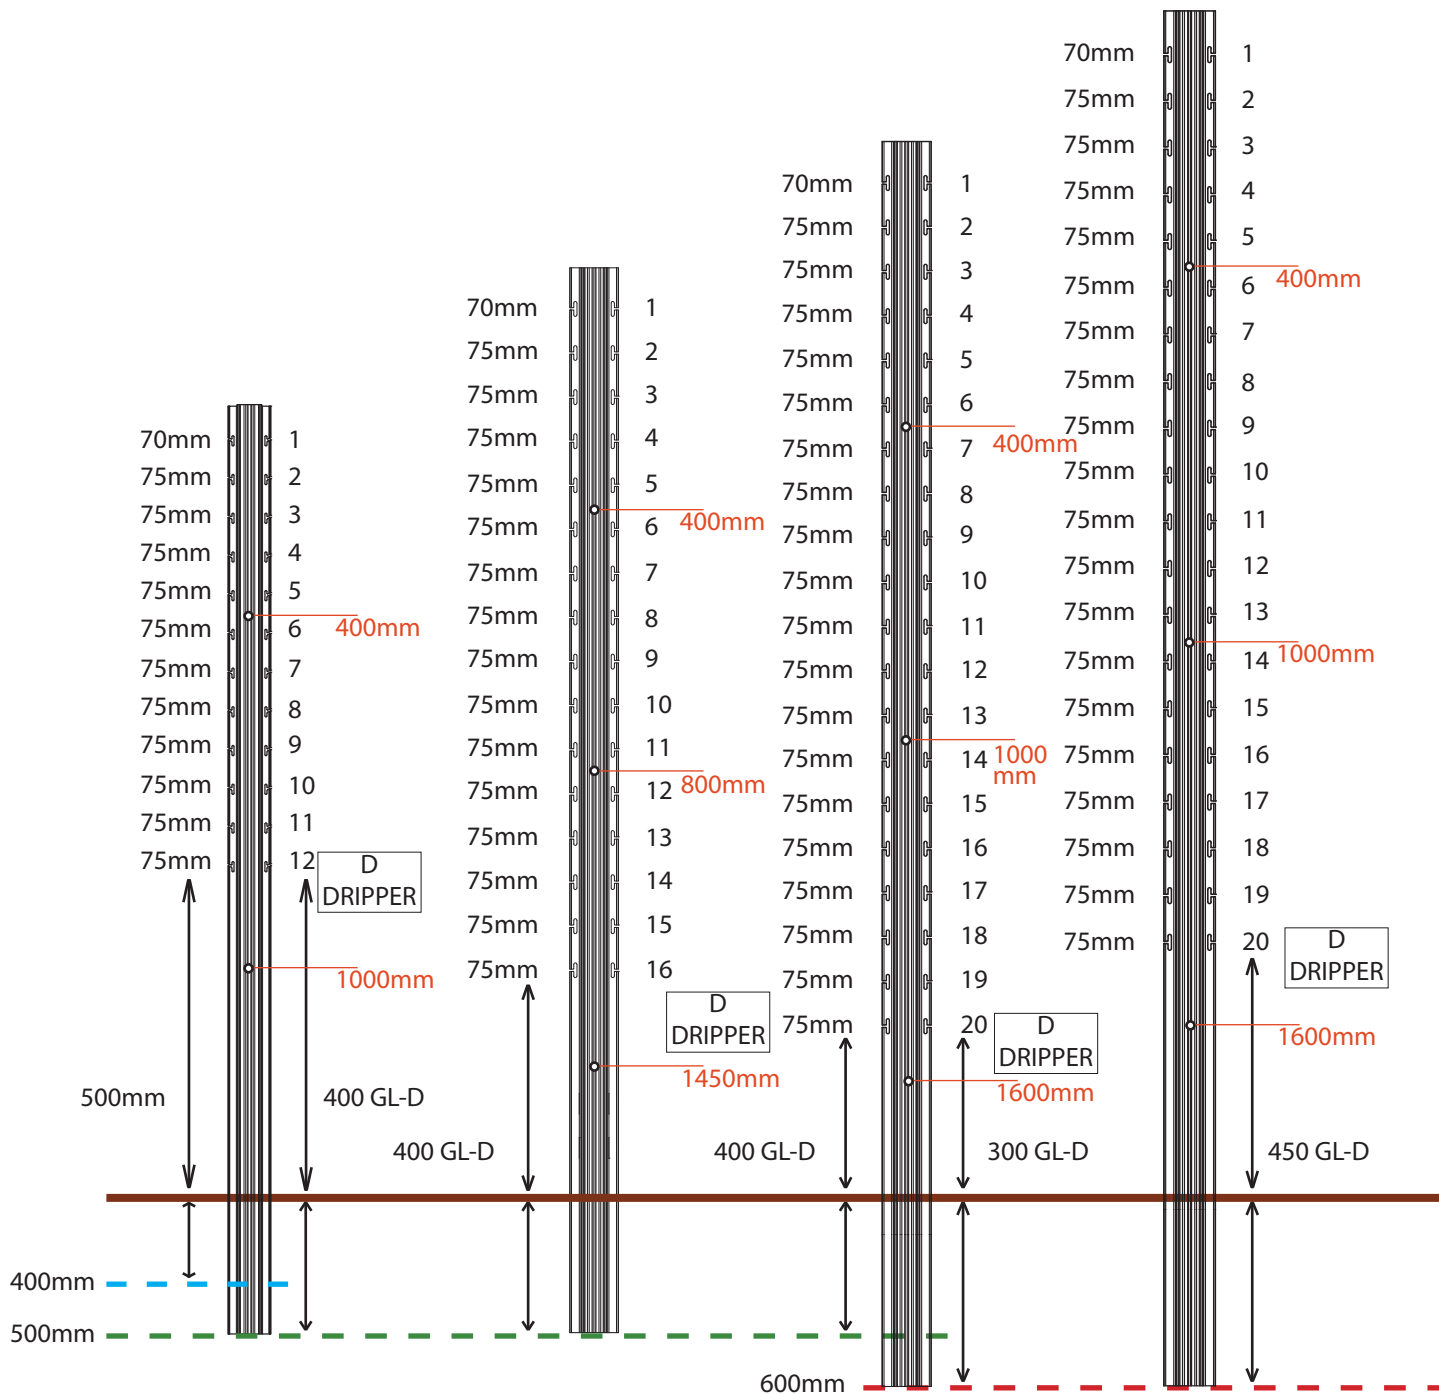

Length		1.8m = 6 feet	2.1m = 7 feet	2.4m = 8 feet	2.7m = 9 feet
Ordering Codes	TWS	A1.8TWS-75-2H	A2.1TWS-75-3H	A2.4TWS-75-3H	A2.7TWS-75-3H
	VSP	A1.8VSP-75-2H	A2.1VSP-75-3H	A2.4VSP-75-3H	A2.7VSP-75-3H