


Ocloc™ B

Ocloc trellis post 150mm wire hole spacings Galfan protected. Available in **VSP** and **TWS**.


Length available in: Number of wire holes:

1.8m = 6 feet	6 holes
2.1m = 7 feet	9 holes
2.4m = 8 feet	10 holes

Thickness of materials: 1.8mm

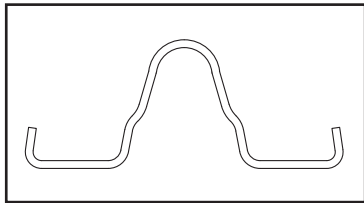


Ocloc B Profile



150mm wire hole spacings

- KEY**
- — — 400mm Recommended insertion depth
 - — — 500mm
 - - - 600mm
- VSP** = Vertical Shoot Positioning
TWS = Two (Three) Wires Simple
 GL = Ground Level
 D = Drripper hole

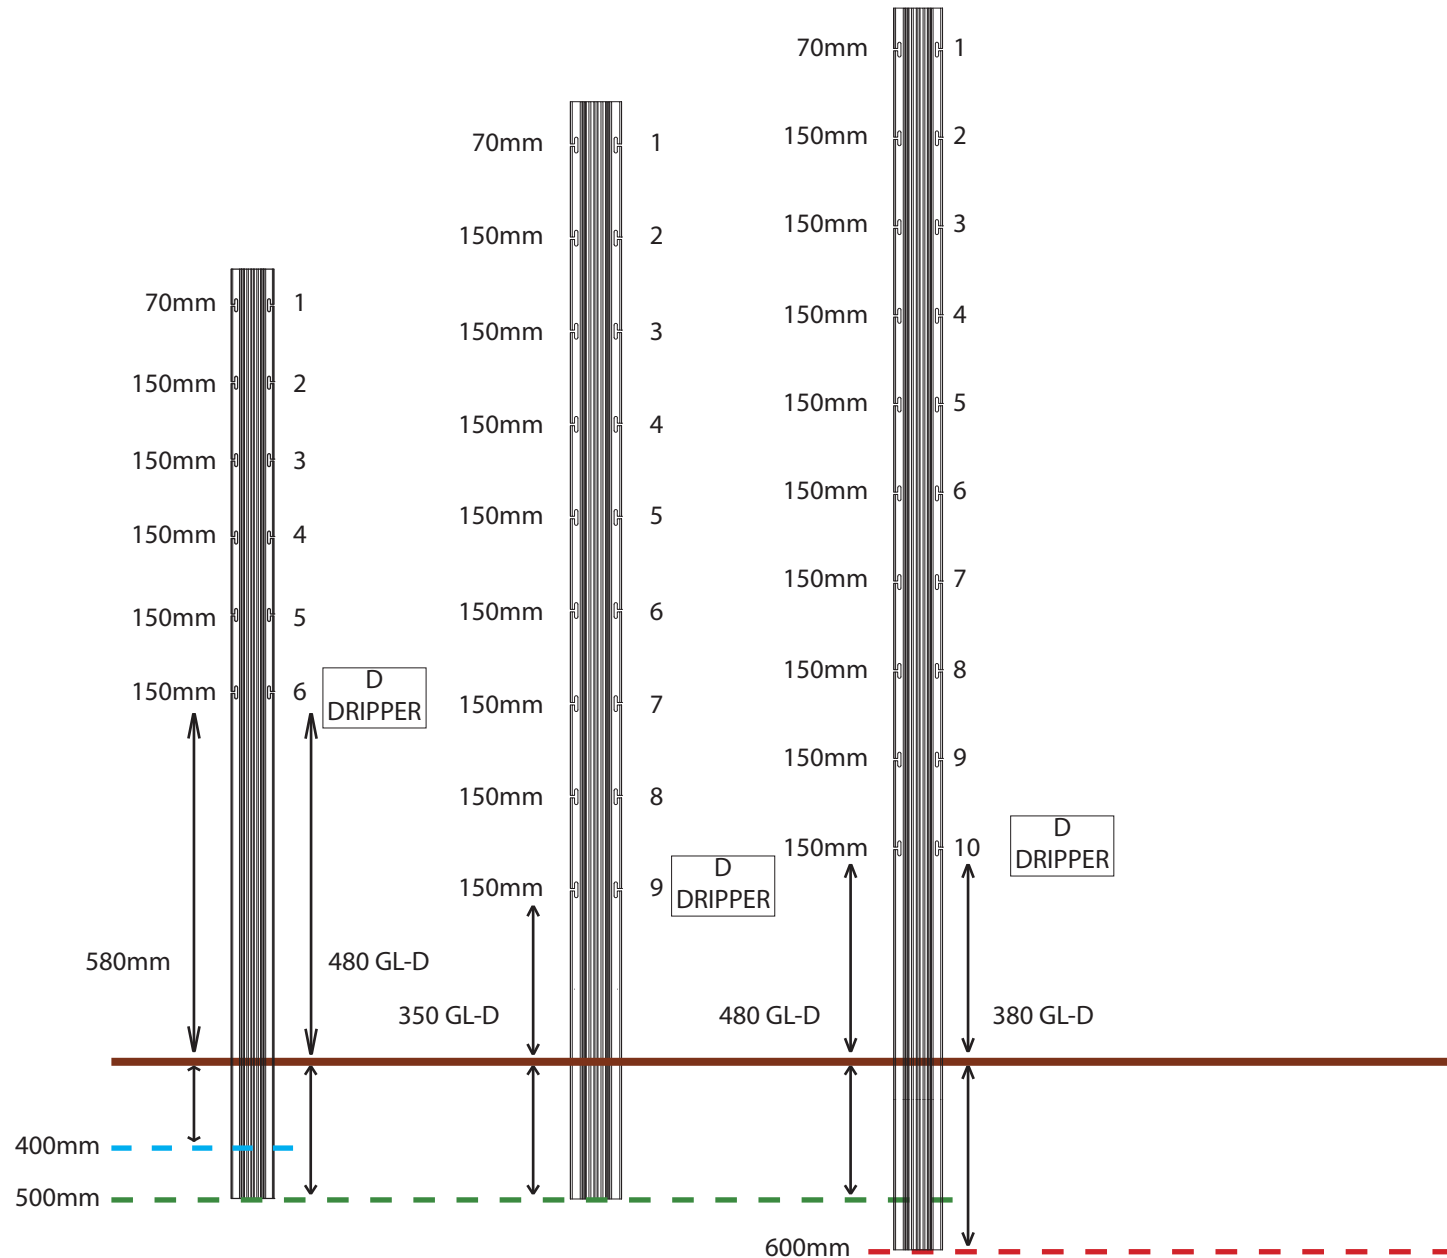

Length		1.8m = 6 feet	2.1m = 7 feet	2.4m = 8 feet
Ordering Codes	TWS	B1-TWS-150	B2.4TWS-150	B2.7TWS-150
	VSP	B1.8VSP-150	B2.1VSP-150	B2.7VSP-150