

# Ocloc™ B

## Total Trellis Systems Manufactured in Australia



- **Robust economical post** for narrow planting, or intermediate between Ocloc A with crop levels below 10 t/ha.
- **Available in 1.8mm thick G450 High tensile steel**
- **GALFAN Coating** 5% Aluminium, Rare Metals, 95% Zinc, the ultimate in corrosive resistant coating
- **75mm wide** to alleviate vine crowding
- **Unique profile** to enhance strength and in ground rigidity
- **Uniquely angled**, strengthened and rounded edge wire holes
- **Robust design** for barrel pruning and machine harvesting
- **Quick and easy to install**, no staples
- **Open profile** so as to not trap water or spray drift with no welding
- **Australian designed, made and owned**

*Ocloc products are carbon neutral — 100% carbon offset —*

**Ocloc™**  
by **Ocvitti**

For further details please contact

**Ocvitti Australia**  
Nigel Catt 0418 832 967  
Visit us at [www.ocloc.com.au](http://www.ocloc.com.au)




**Admin@ocloc.com.au**  
[nigel@ocloc.com.au](mailto:nigel@ocloc.com.au)





# Ocloc™ B

## Total Trellis Systems

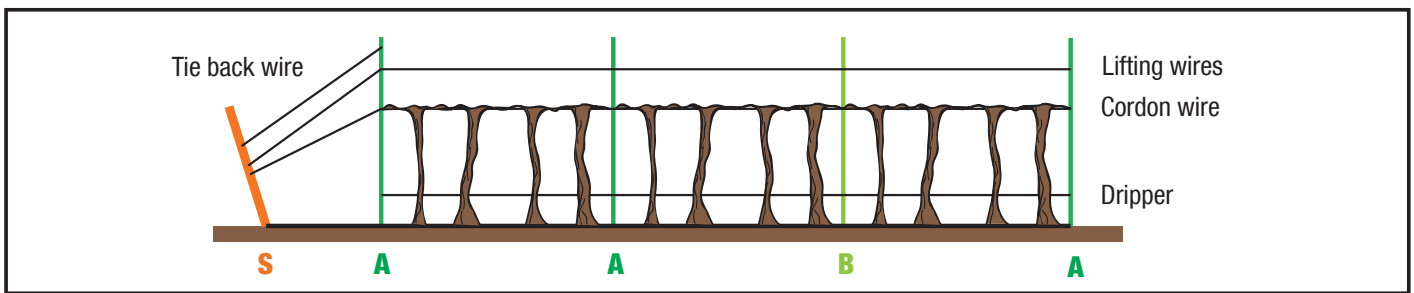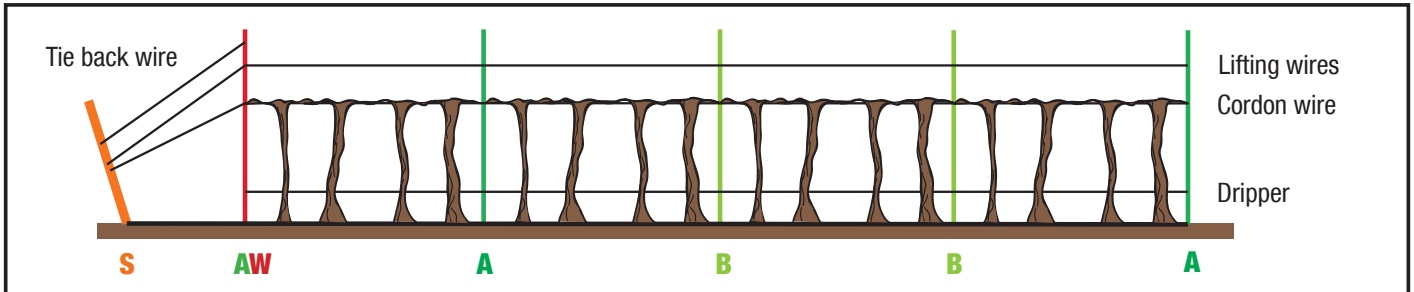


Rounded wire holes.




Dome netting cap.



Ocloc NSC - Netting Spray Cap.




VSP 20° angle.




TWS 30° angle.




Dripper wire.



75mm wire hole spacing.



150mm wire hole spacing.



Curved edges to protect mechanical picking rods & pruning knives.

<b>A</b>	Trellis post
<b>B</b>	Intermediate
<b>S</b>	Strainer
<b>AW</b>	Large post

- **Ocloc B** posts can be ordered in wire spacing and trellis configuration to suit specific vineyard requirements.
- **GALFAN** for corrosion resistance. More information can be found at: [www.galfan.com](http://www.galfan.com)
- Bundles of 200
- **75mm** and **150mm** wire spacing
- Available in VSP or TWS.
- Available in several lengths

1.8m - 6 feet      2.1m - 7 feet

2.4m - 8 feet      2.7m - 8 feet

