



Total Trellis Systems

Manufactured in Australia



- Available in 1.8mm thick G450 High tensile steel
- GALFAN Coating 5% Aluminium, Rare Metals, 95% Zinc, the ultimate in corrosive resistant coating
- 86mm wide to alleviate vine crowding
- First in post
- Outside rows or excessively windy sites
- Unique profile to enhance strength and in ground rigidity
- Uniquely angled, strengthened and rounded edge wire holes
- Robust design for barrel pruning and machine harvesting
- Quick and easy to install, no staples
- Australian designed, made and owned

Ocloc products are carbon neutral — 100% carbon offset —




For further details please contact

Ocvitti Australia
Nigel Catt 0418 832 967
Visit us at www.ocloc.com.au



Admin@ocloc.com.au
nigel@ocloc.com.au



Total Trellis Systems

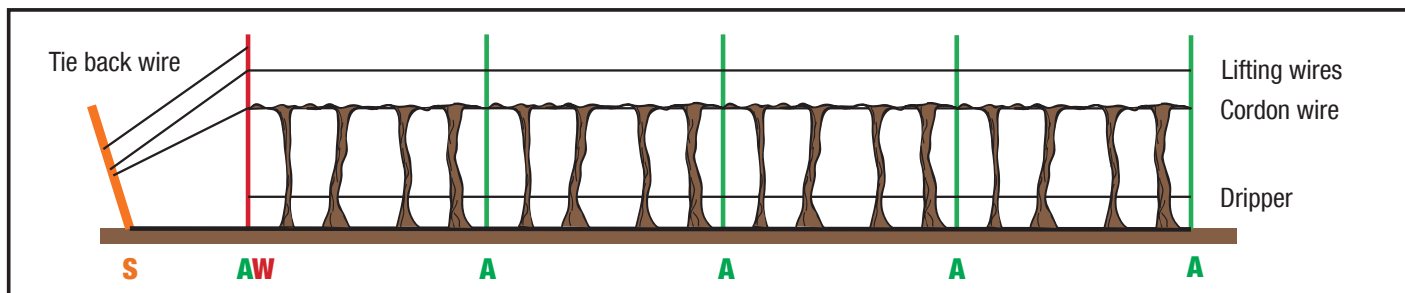

Alternative Trellis Structure

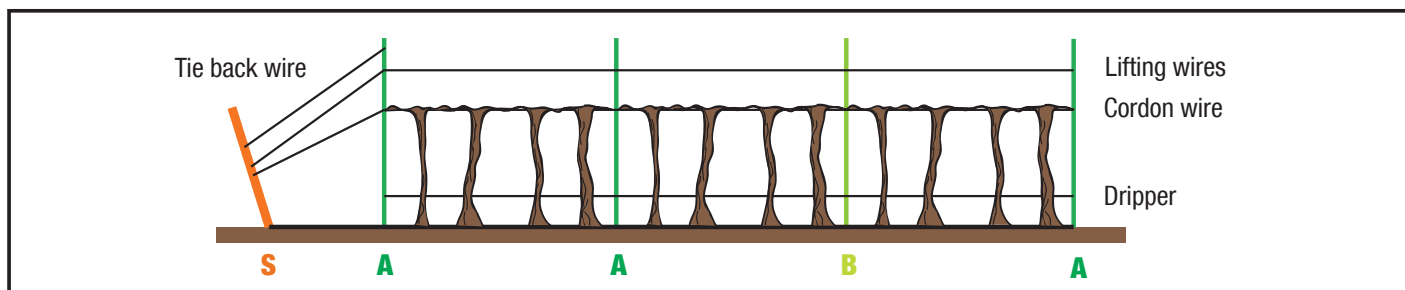


Rounded wire holes.




Anti Sink Plate



Ocloc NSC - Netting Spray Cap.




VSP 20° angle.




TWS 30° angle.




Dripper wire.



75mm wire hole spacing.



150mm wire hole spacing.



Curved edges to protect mechanical picking rods & pruning knives.

A	Trellis post
B	Intermediate
S	Strainer
AW	Large post

- **Ocloc AW** posts can be ordered in wire spacing and trellis configuration to suit specific vineyard requirements.
- **GALFAN** for corrosion resistance. More information can be found at: www.galfan.com
- Bundles of 150
- **75mm** and **150mm** wire spacing
- Available in VSP or TWS.
- Available in several lengths

1.8m - 6 feet

2.1m - 7 feet

2.4m - 8 feet

2.7m - 8 feet

