

Ocloc™ A

Ocloc trellis post 150mm wire hole spacings Galvanneal protected. Available in **VSP** and **TWS**.

Length available in: Number of wire holes:

1.8m = 6 feet

6 holes

2.1m = 7 feet

8 holes


2.4m = 8 feet

10 holes


2.7m = 9 feet

10 holes

Thickness of materials: 1.8mm

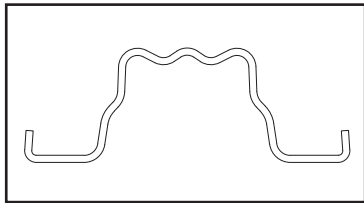

Ocloc A Profile

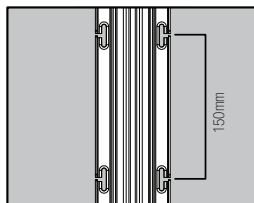


150mm wire hole spacings

KEY

- 400mm Recommended insertion depth
- 500mm
- 600mm

- VSP** = Vertical Shoot Positioning
- TWS** = Two (Three) Wires Simple
- GL = Ground Level
- D = Dropper hole

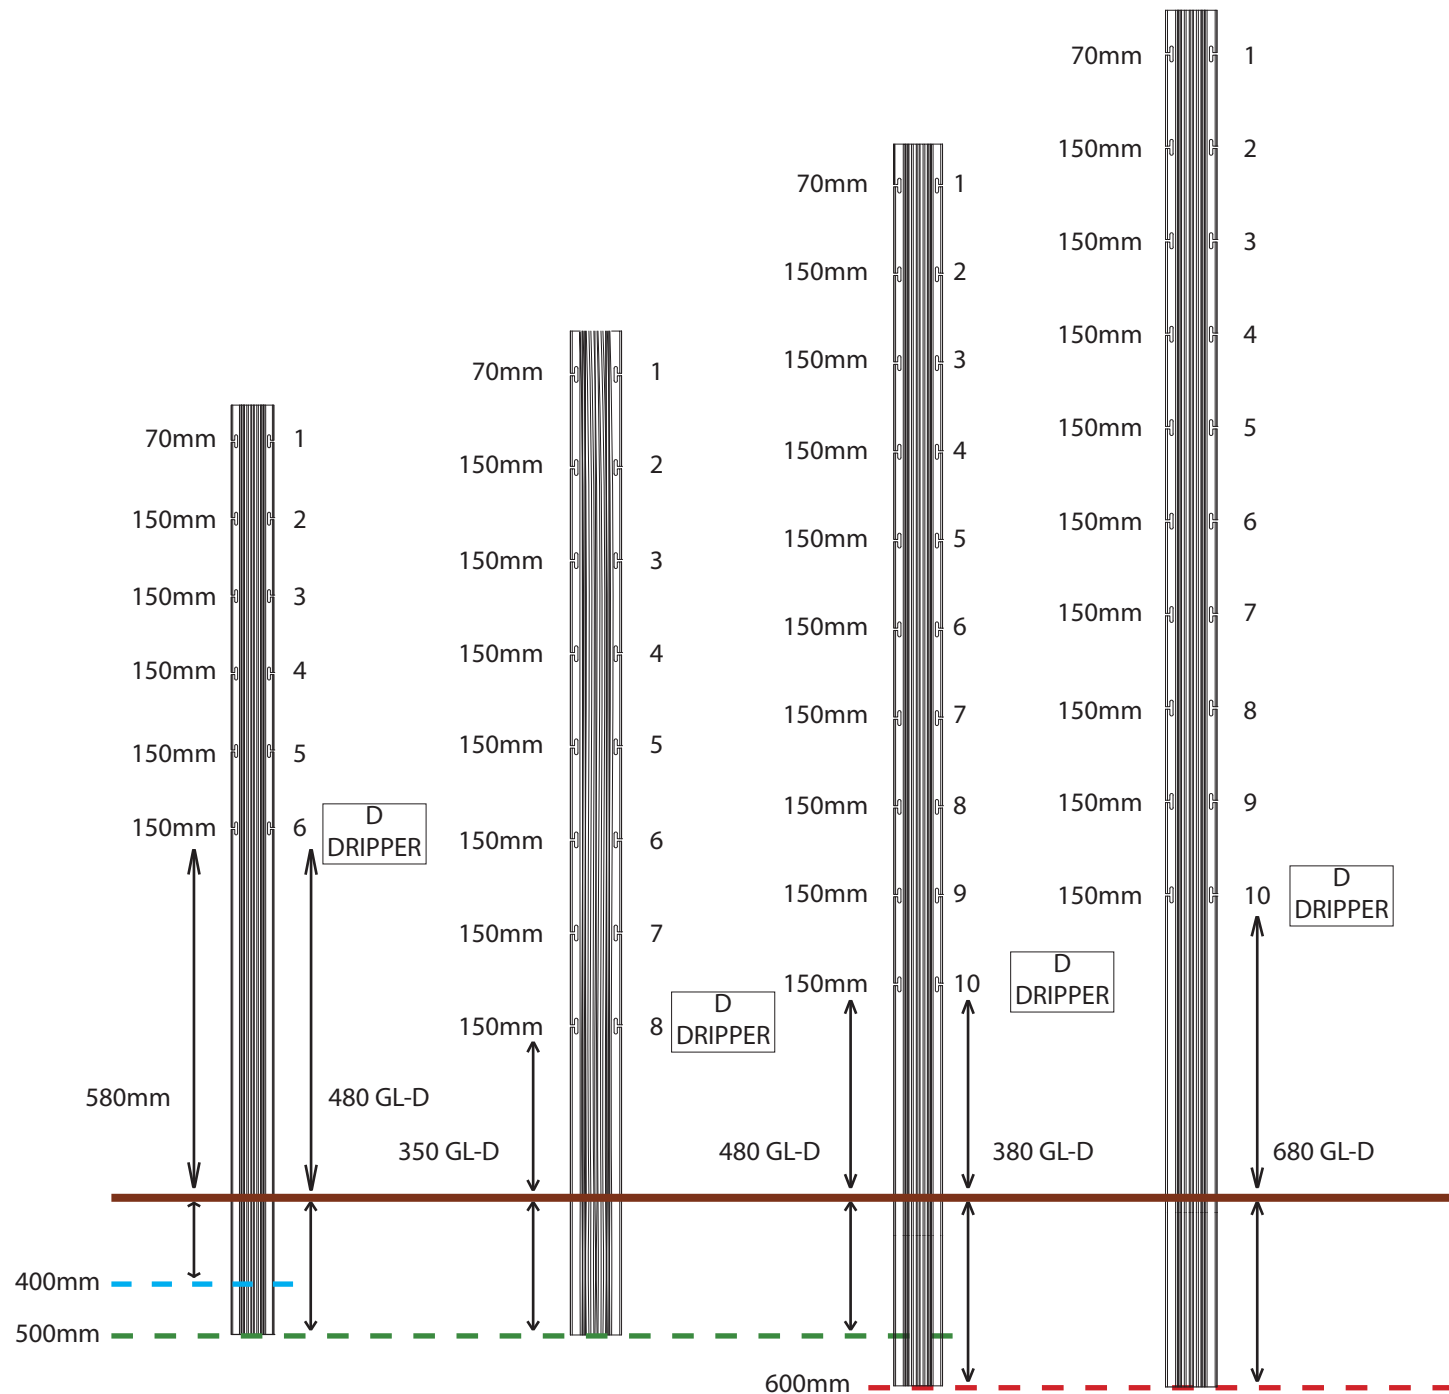

Length		1.8m = 6 feet	2.1m = 7 feet	2.4m = 8 feet	2.7m = 9 feet
Ordering Codes	TWS	A1.8TWS-150	A2.1TWS-150	A2.4TWS-150	A2.7TWS-150
	VSP	A1.8VSP-150	A2.1VSP-150	A2.4VSP-150	A2.7VSP-150