

Ocloc™ V

Repair broken wooden posts Manufactured in Australia

Function: long term repair for broken wooden posts
Reduce cost, keep the wooden post in place

Material: G450 high tensile steel for strength

Coating: GALFAN Coating 5% Aluminium, Rare Metals, 95% Zinc,
the ultimate in corrosive resistant coating for durability

Thickness: CV 1.55mm Galvaspan

CV 1.6mm Galfan

BV 1.8mm Galfan

Lengths: 900mm 1.05m 1.2m 2.1m 2.4m

The shape of **Ocloc V** fits onto the post with no sharp edges and
is ideal for under vine management

4 x 75 mm shark tooth screws are provided

No need for new chemically treated toxic wooden post as
replacements

Maintain organic status

No new post = reduction in carbon offset footprint

No need to cut staples, remove the post to over stocked
graveyards, bring out new post then ram and re-staple the wires

No expensive tractor required, no hard soil panning

Ocloc V: all that is required is a side by side trailer, petrol rammer
and drill

Designed and manufactured in Australia



Ocloc products are carbon neutral — 100% carbon offset —



For further details please contact


Ocvitti Australia
Nigel Catt 0418 832 967
Visit us at www.ocloc.com.au

admin@ocloc.com.au
nigel@ocloc.com.au





Ocloc™ V

Repair broken wooden posts Manufactured in Australia

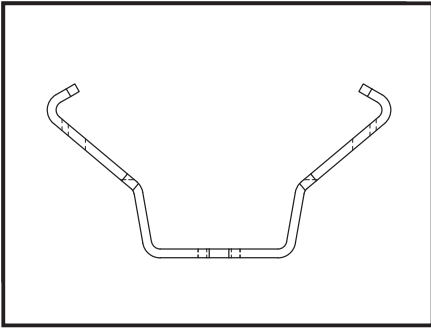

Ocloc V profile

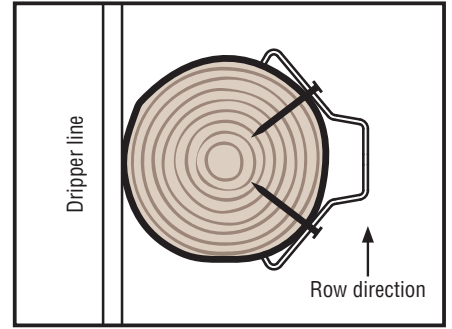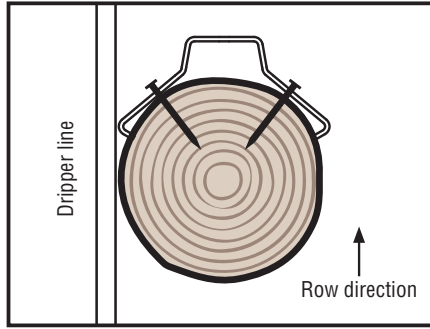

Ocloc V - 4 screws



Ocloc V - Ramming



Ocloc V - Screwing


Ocloc V is available in 1.55mm Galvaspan,
1.6mm Galfan, 1.8mm Galfan

Available in 900mm, 1.05m, 1.2m, 2.1m, 2.4m

Bundles of 252



Shark Tooth Bugle Batten Screw,
75mm come in boxes of 500.



Watch video



Ocloc products are carbon neutral — 100% carbon offset —



For further details please contact

Ocvitti Australia
Nigel Catt 0418 832 967
Visit us at www.ocloc.com.au

admin@ocloc.com.au
nigel@ocloc.com.au

