


Ocloc™ B

Ocloc trellis post 75mm wire hole spacings
Galvanneal protected. Available in **VSP** and **TWS**.


Length available in: Number of wire holes:

| | |
|---------------|----------|
| 1.8m = 6 feet | 12 holes |
| 2.1m = 7 feet | 16 holes |
| 2.4m = 8 feet | 20 holes |

Thickness of materials: 1.8mm

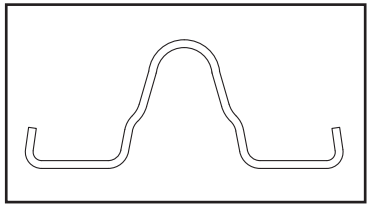


Ocloc B Profile

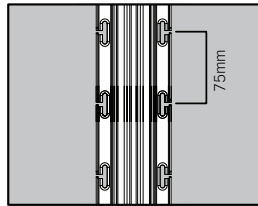

75mm wire hole spacings

- KEY**
- — — 400mm Recommended insertion depth
 - - - 500mm
 - - - 600mm
- VSP** = Vertical Shoot Positioning
TWS = Two (Three) Wires Simple
 GL = Ground Level
 D = Dripper hole

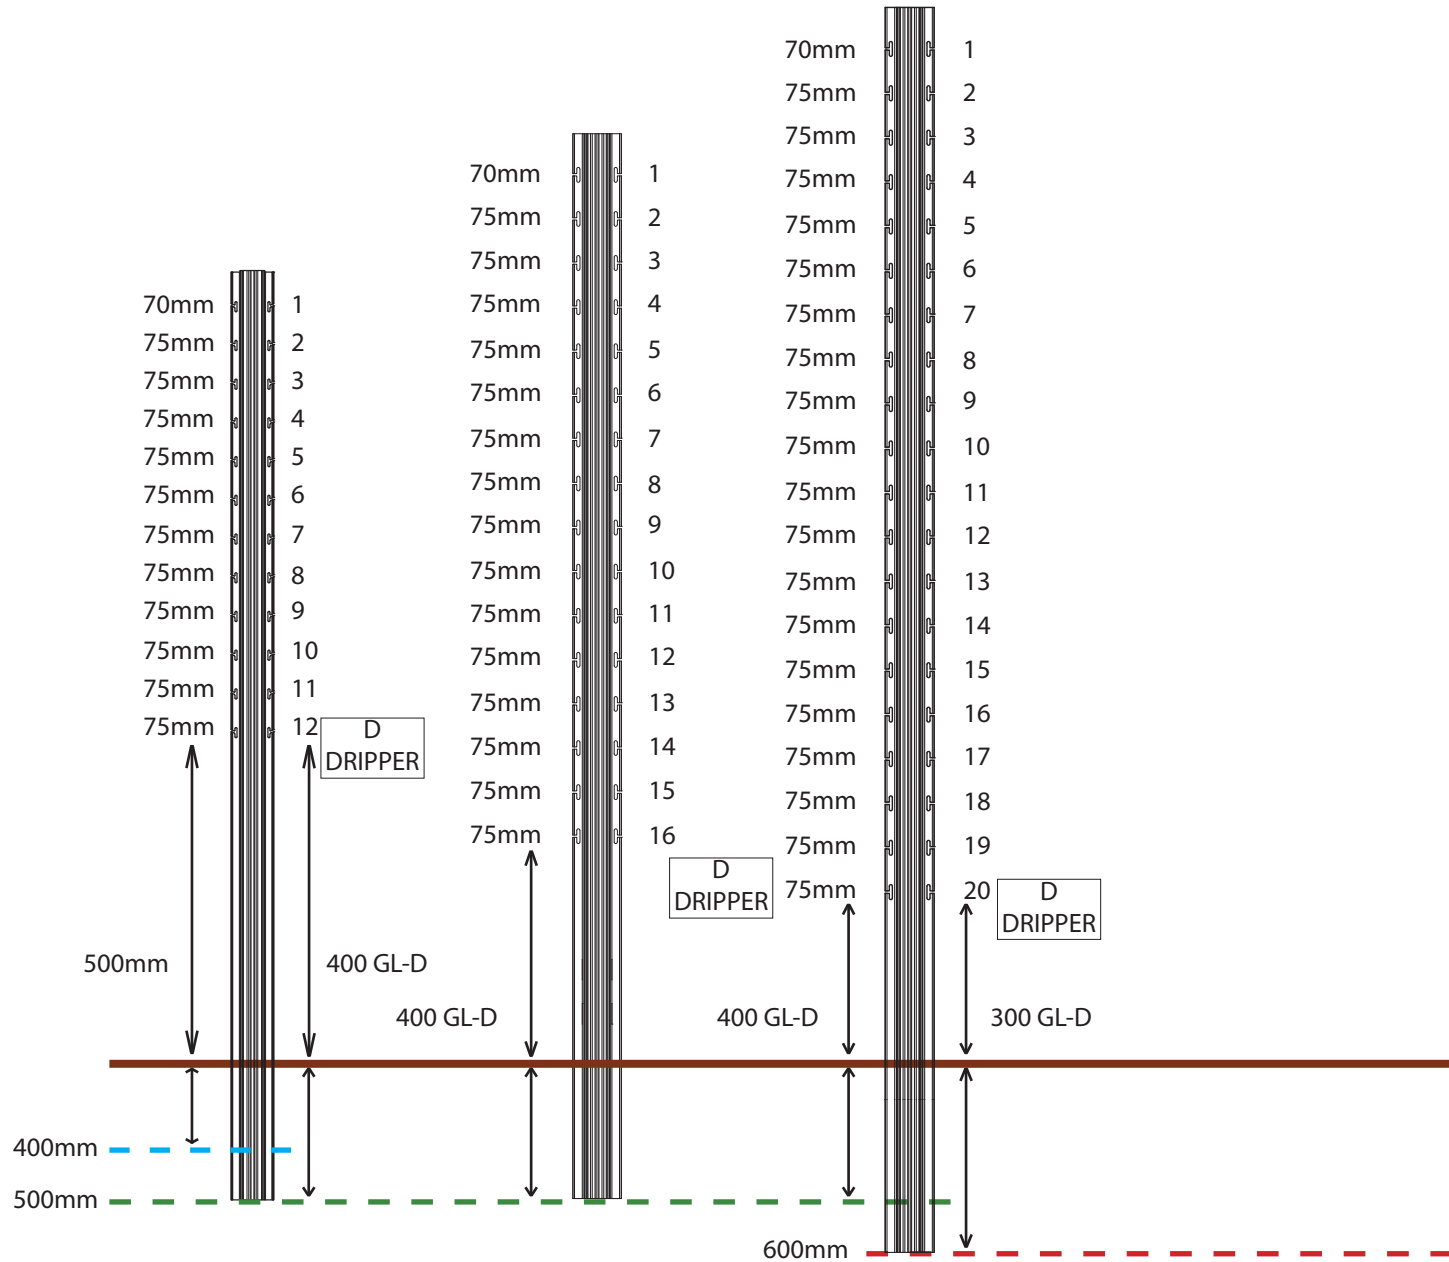

| Length | | 1.8m = 6 feet | 2.1m = 7 feet | 2.4m = 8 feet |
|----------------|------------|---------------|---------------|---------------|
| Ordering Codes | TWS | B1.8TWS-75 | B2.4TWS-75 | B2.7TWS-75 |
| | VSP | B1.8VSP-75 | B2.1VSP-75 | B2.4VSP-75 |