## ()cloc\*A

## Total Trellis Systems Manufactured in Australia



- Available in 1.8mm thick G450 High tensile steel
- GALFAN Coating 5% Aluminium, Rare Metals, 95% Zinc, the ultimate in corrosive resistant coating
- 86mm wide to alleviate vine crowding
- Unique profile to enhance strength and in ground rigidity
- Uniquely angled, strengthened and rounded edge wire holes
- Robust design for barrel pruning and machine harvesting
- Quick and easy to install, no staples
- Australian designed, made and owned



Ocloc products are carbon neutral — 100% carbon offset




For further details please contact







## **Total Trellis Systems**

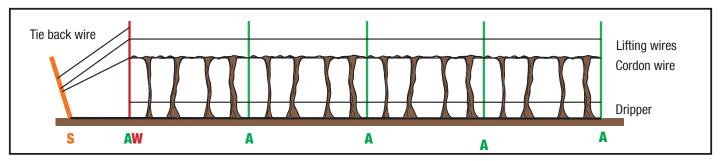

## Alternative Trellis Structure

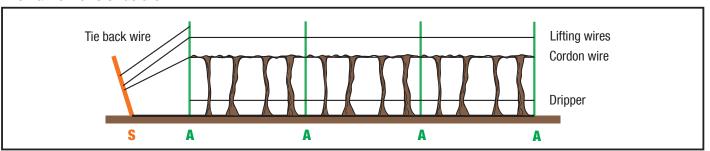




Rounded wire holes.



Dome netting cap.



Ocloc NSC - Netting Spray Cap.



VSP 20° angle.

30° angle
-----------

TWS 30° angle.



Dripper wire.

	<b>€</b> 75mm
<u> </u>	<u>-</u>

75mm wire hole spacing.

ر <b>ک</b> ا	Ğ	150mm
Ĵ	<u> </u>	150

150mm wire hole spacing.

|--|--|

Curved edges to protect mechanical picking rods & pruning knives.

A	Trellis post	
В	Intermediate	
S	Strainer	
AW	Large post	

- Ocloc A posts can be ordered in wire spacing and trellis configuration to suit specific vineyard requirements.
- GALFAN for corrosion resistance.
   More information can be found at: www.galfan.com
- Bundles of 200
- 75mm and 150mm wire spacing
- Available in VSP or TWS.
- Available in several lengths

1.8m - 6 feet	2.1m - 7 feet
2.4m - 8 feet	2.7m - 8 feet









For further details please contact

Ocvitti Australia Nigel Catt 0418 832 967 Visit us at www.ocloc.com.au Admin@ocloc.com.au nigel@ocloc.com.au

