


Ocloc™ A


Ocloc trellis post 75mm wire hole spacings
Galvanneal protected. Available in **VSP** and **TWS**.

Length available in:	Number of wire holes:
1.8m = 6 feet	12 holes
2.1m = 7 feet	16 holes
2.4m = 8 feet	20 holes
2.7m = 9 feet	20 holes

Thickness of materials: 1.8mm

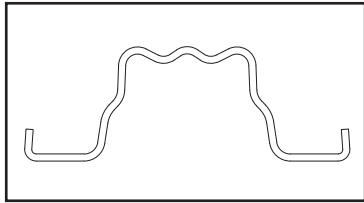


Ocloc A Profile



75mm wire hole spacings

- KEY**
- 400mm Recommended insertion depth
 - - - 500mm
 - - - 600mm
- VSP** = Vertical Shoot Positioning
TWS = Two (Three) Wires Simple
 GL = Ground Level
 D = Dripper hole

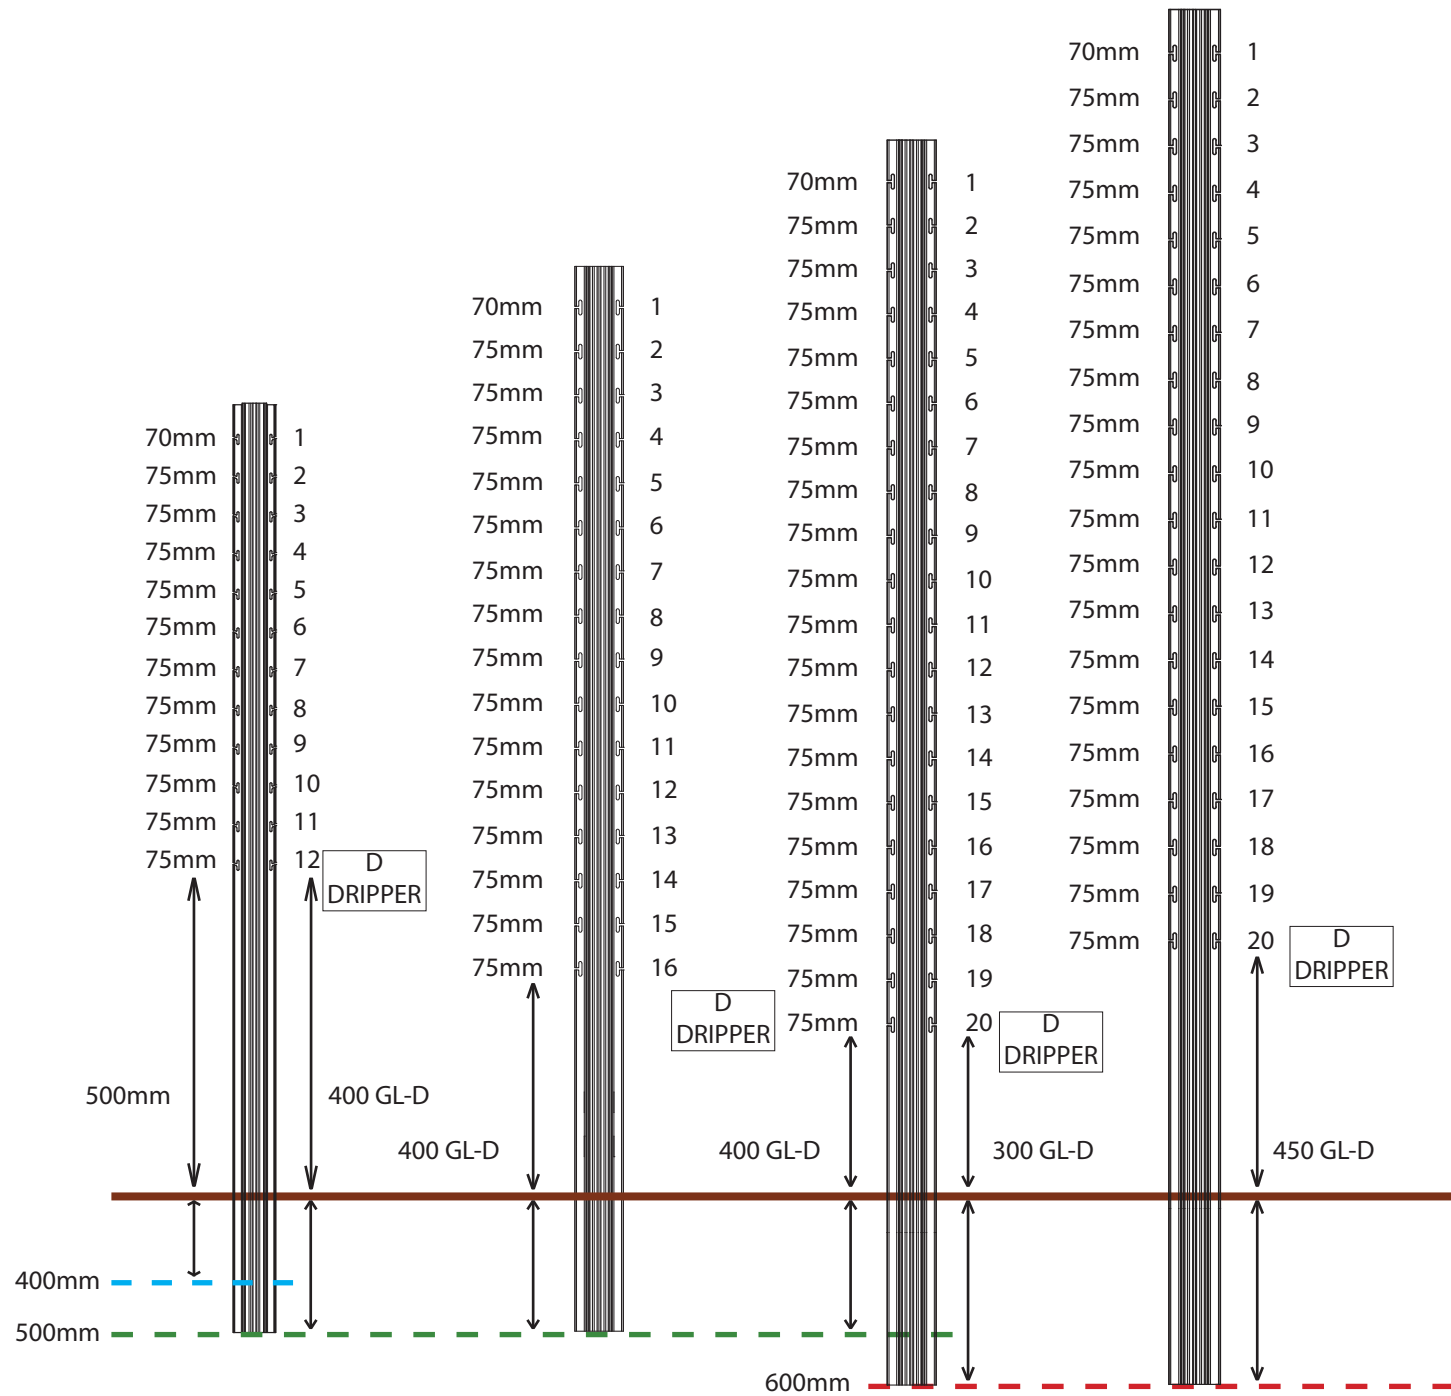

Length		1.8m = 6 feet	2.1m = 7 feet	2.4m = 8 feet	2.7m = 9 feet
Ordering Codes	TWS	A1.8TWS-75	A2.1TWS-75	A2.4TWS-75	A2.7TWS-75
	VSP	A1.8VSP-75	A2.1VSP-75	A2.4VSP-75	A2.7VSP-75