


Ocloc™ A

+ SPINE HOLES


Ocloc trellis post 150mm wire hole spacings Galfan protected. Available in **VSP** and **TWS**.

Length available in:	Number of wire holes:
1.8m = 6 feet	6 holes
2.1m = 7 feet	9 holes
2.4m = 8 feet	10 holes
2.7m = 9 feet	10 holes

Thickness of materials: 1.8mm

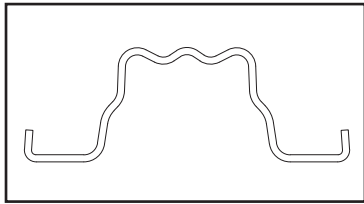

Ocloc A Profile




150mm wire hole spacings

KEY

- — — 400mm Recommended insertion depth
- — — 500mm Recommended insertion depth
- — — 600mm Recommended insertion depth
- 8.5mm screw hole for a shark tooth screw

- VSP** = Vertical Shoot Positioning
- TWS** = Two (Three) Wires Simple
- GL = Ground Level
- D = Drripper hole

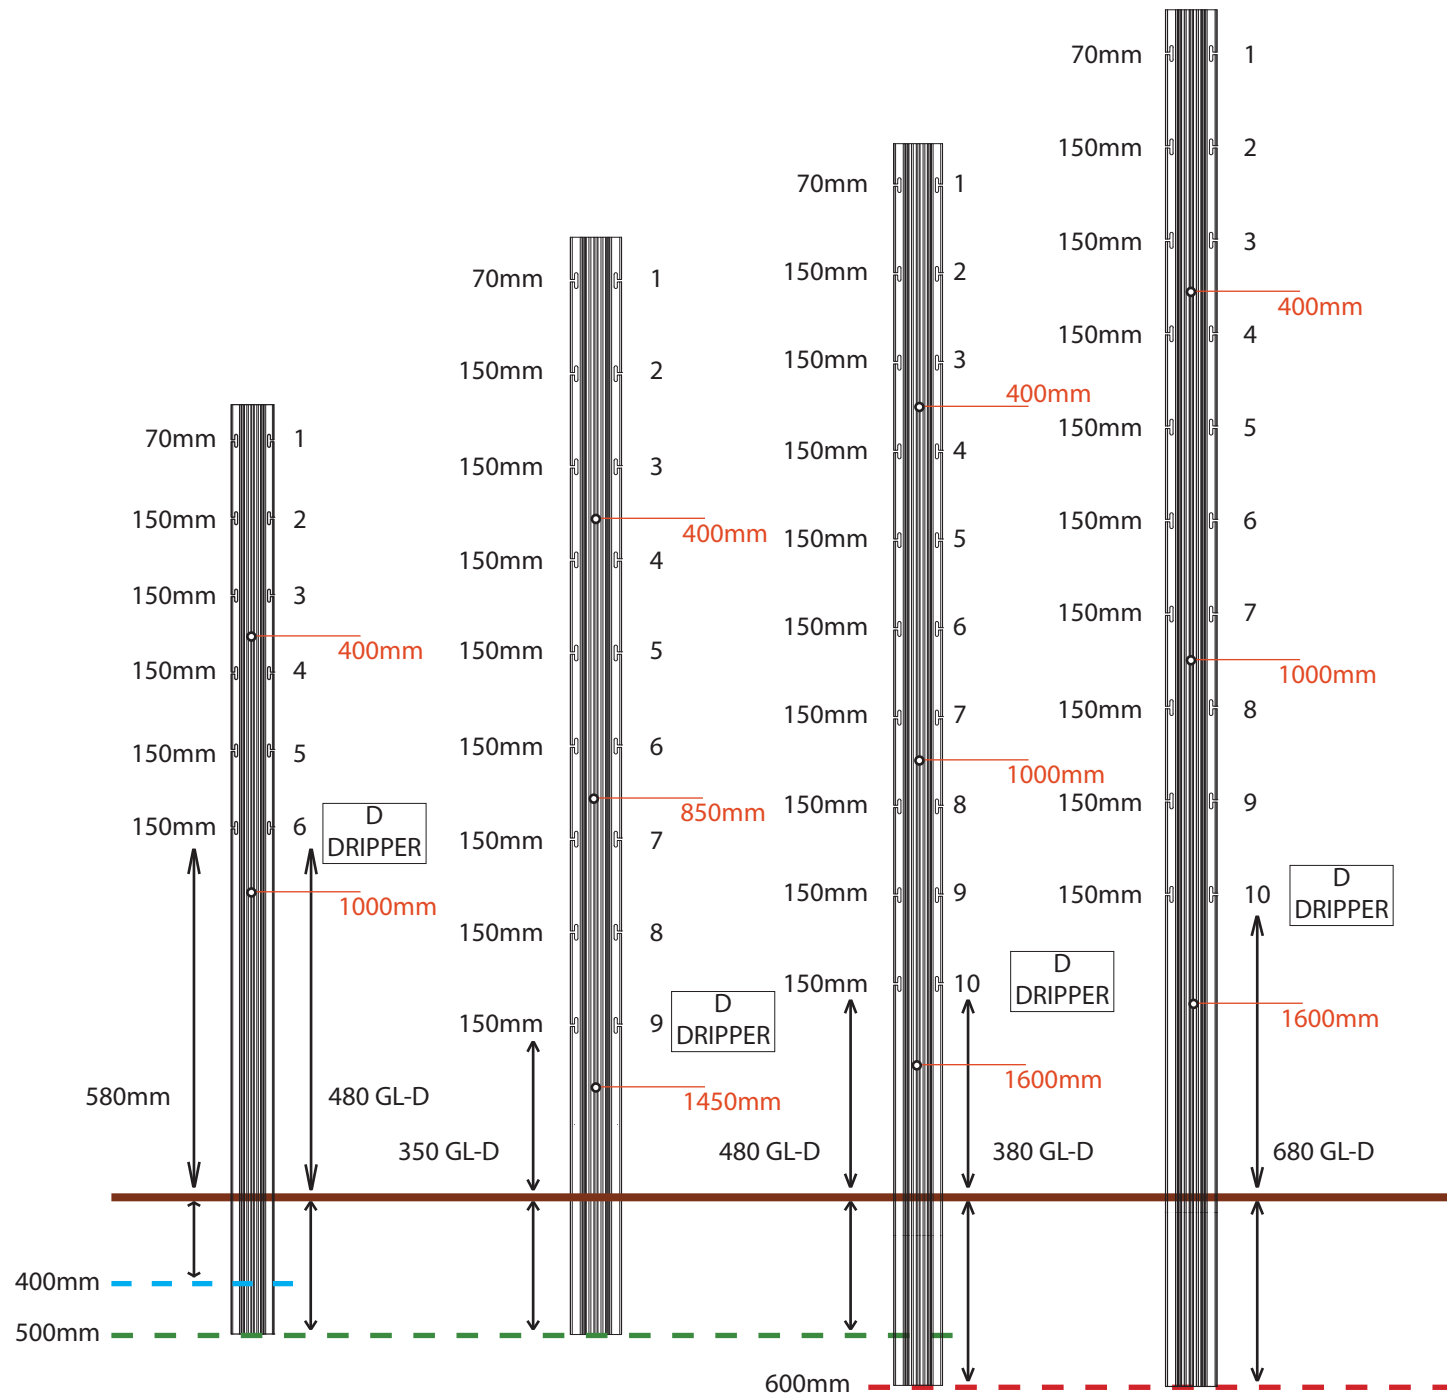

Length		1.8m = 6 feet	2.1m = 7 feet	2.4m = 8 feet	2.7m = 9 feet
Ordering Codes	TWS	A1.8TWS-150-2H	A2.1TWS-150-3H	A2.4TWS-150-3H	A2.7TWS-150-3H
	VSP	A1.8VSP-150-2H	A2.1VSP-150-3H	A2.4VSP-150-3H	A2.7-VSP-150-3H