


# Ocloc™ A


Ocloc trellis post 150mm wire hole spacings Galvanneal protected. Available in **VSP** and **TWS**.

Length available in:	Number of wire holes:
1.8m = 6 feet	6 holes
2.1m = 7 feet	9 holes
2.4m = 8 feet	10 holes
2.7m = 9 feet	10 holes

Thickness of materials: 1.8mm

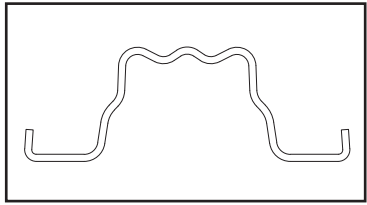


Ocloc A Profile



150mm wire hole spacings

- KEY**
- 400mm Recommended insertion depth
  - - - 500mm
  - - - 600mm
- VSP** = Vertical Shoot Positioning  
**TWS** = Two (Three) Wires Simple  
 GL = Ground Level  
 D = Dripper hole

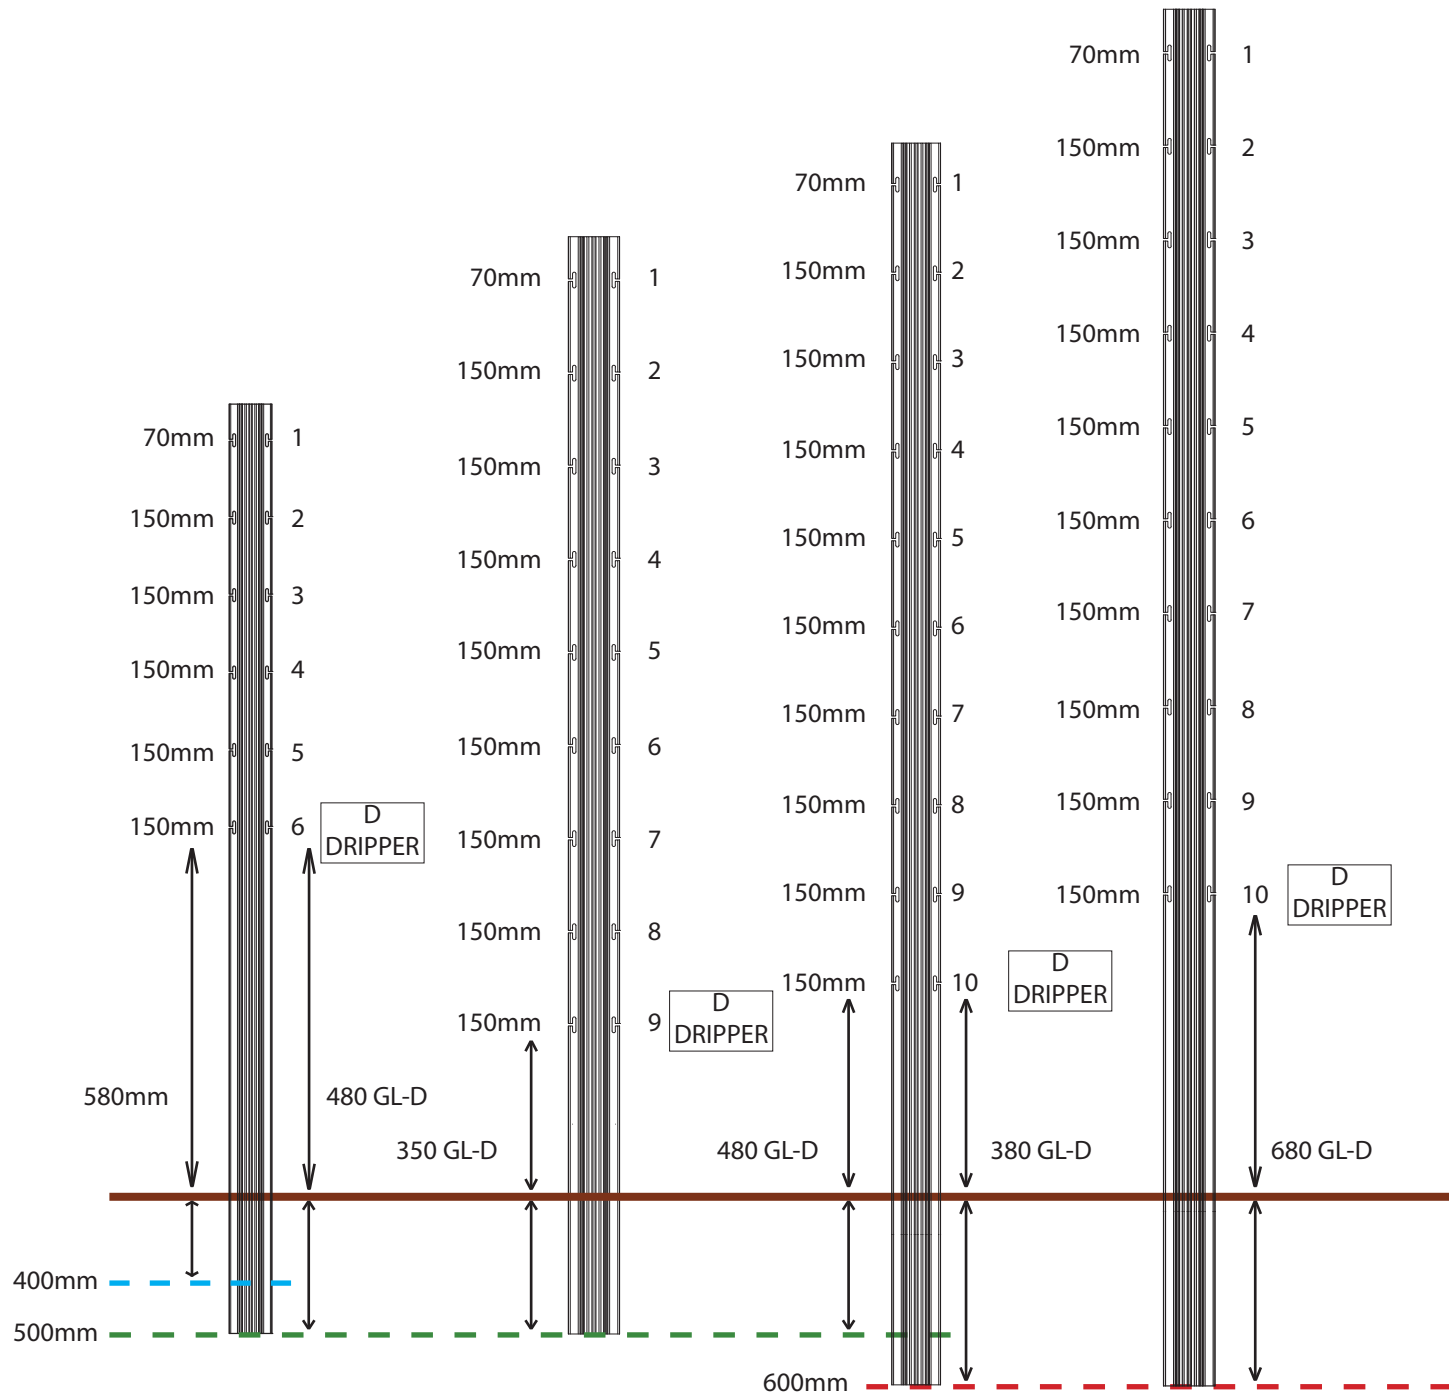

Length		1.8m = 6 feet	2.1m = 7 feet	2.4m = 8 feet	2.7m = 9 feet
Ordering Codes	<b>TWS</b>	A1.8TWS-150	A2.1TWS-150	A2.4TWS-150	A2.7TWS-150
	<b>VSP</b>	A1.8VSP-150	A2.1VSP-150	A2.4VSP-150	A2.7VSP-150