

OK Fencing Systems

Designed and Manufactured in Australia



OKW Post / Picket

Function: Live stock, exclusion and conservation. Barb wire fencing, lane ways and boundaries. Strengthening post

Material: High tensile steel, with flex and return for wildlife or stock impact

Coating: GALFAN Coating 5% Aluminum, Rare Metals, 95% Zinc, the ultimate in corrosive resistant coating for durability

Thickness: 2.4mm thick

Width: 86mm wide post/picket

Length: 1.65m, 1.8m, 2.1m, 2.4m, 2.7m

Wire Holes: Available in 75mm wire hole spacings, suitable for multiple mesh spacing

Special Features:

- Easy to load wire slots for twitching - 300mm x 2.5mm thick
- Heavy rocky soil strengthening post
- The profile enhances strength and rigidity in the ground
- **Designed and manufactured in Australia**



OK products are carbon offset at manufacturing — Australian designed & manufactured



Sales Enquiries: +61 (0) 488 662 562
Nigel Catt: nigel@ocloc.com.au
www.ocloc.com.au

OK Fencing Systems

Designed and Manufactured in Australia

Ocloc Kakadu OKW fence post/picket - 75mm wire hole spacings

Function: Stock control strengthening post

Material: High tensile steel, with flex


Coating: GALFAN Coating 5% Aluminum, Rare Metals, 95% Zinc, the ultimate in corrosive resistant coating www.galfan.com

Thickness: 2.4mm thick


Width: 86mm wide post/picket

Length: 1.65m, 1.8m, 2.1m, 2.4m, 2.7m

Twist Wire: 300mm x 2.5mm thick

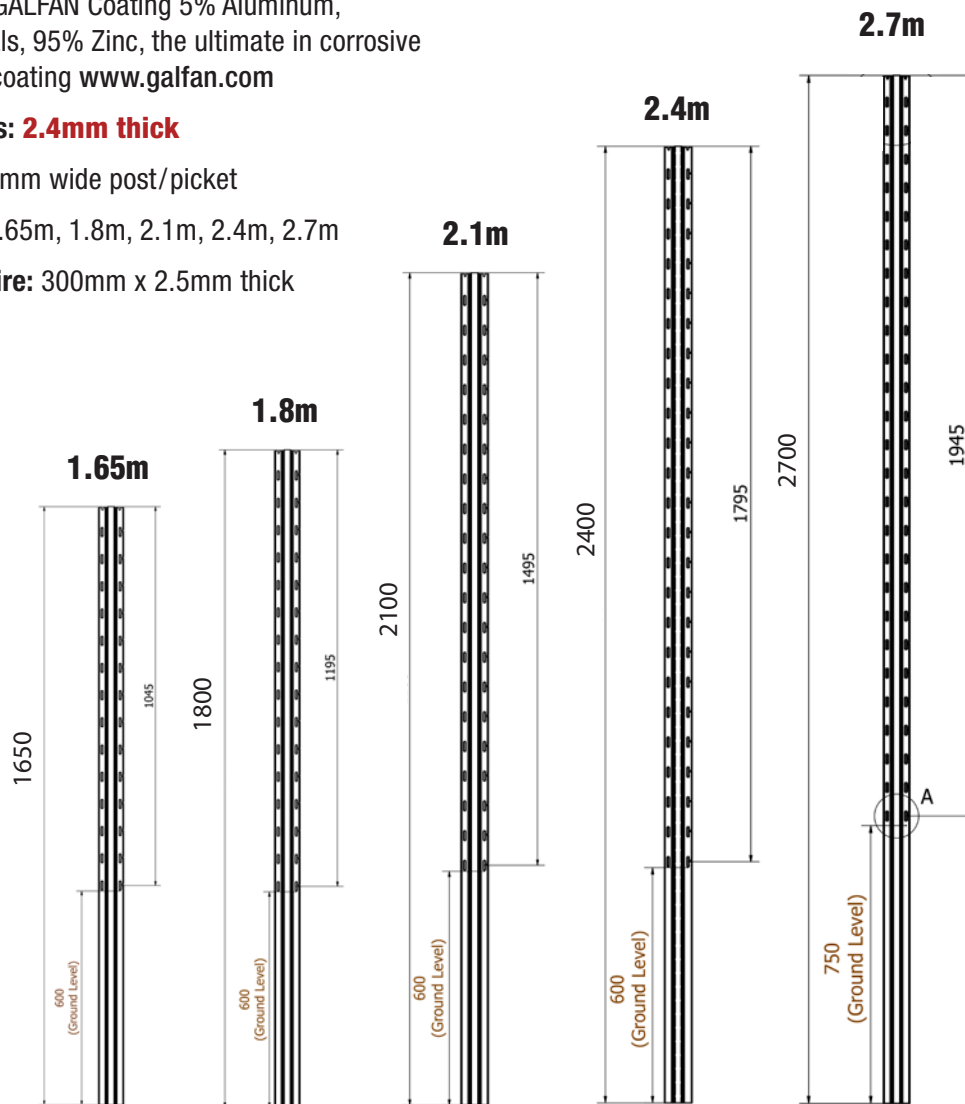

Lengths of OKW	1.65	1.8	2.1	2.4	2.7
Wire hole numbers at spacings 75mm	14	16	20	24	26



Ground level view bottom wire hole

If there is a feature you need to vary on this product, such as depth, insertion or hole quantities, please send us your drawings.

OK products are carbon offset at manufacturing — Australian designed & manufactured




Sales Enquiries: +61 (0) 488 662 562
Nigel Catt: nigel@ocloc.com.au
www.ocloc.com.au

OCAG OK


OK Fencing Systems

Designed and Manufactured in Australia

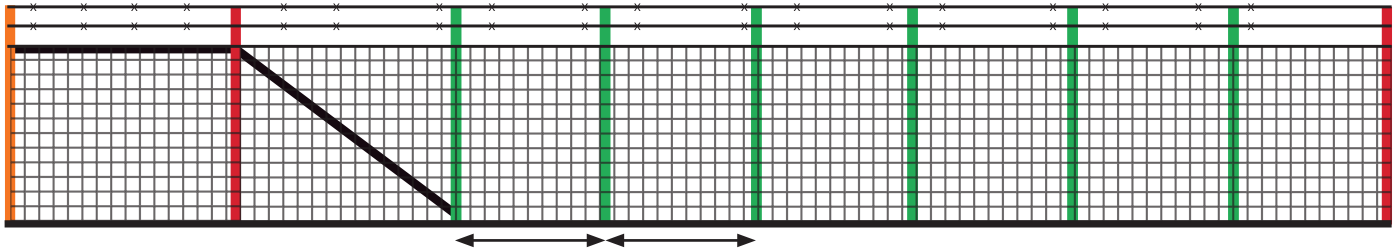

This diagram is an indication only, Ocloc Kakadu OKA distances between posts from 5-8m.


OKA	Fencing Post	OKU	Strainer
OKB	Intermediate	OKW	Large Post
OKAS	Angle Stay		

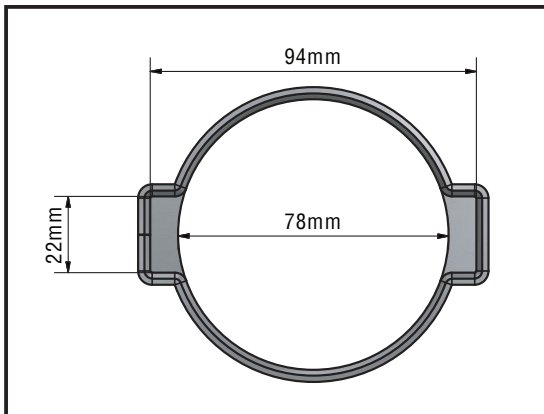


Christie Rammer dimensions.



Christie Rammer.

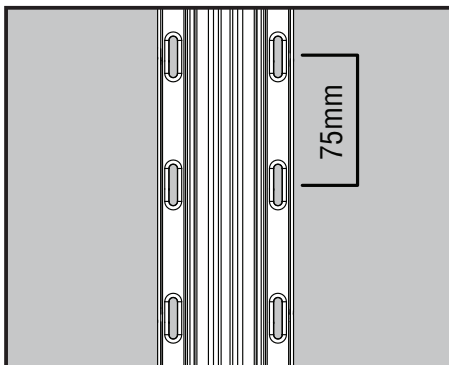

75mm wire hole spacing.

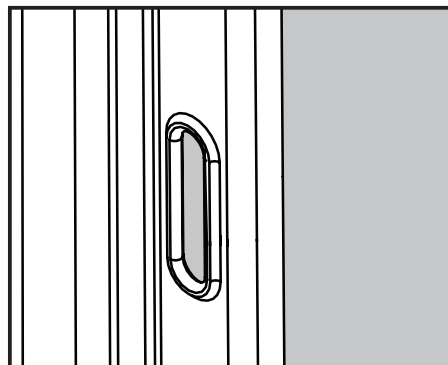

Rounded wire holes.

Ocloc Kakadu OKW
fencing posts 75mm wire spacing.

GALFAN for corrosion resistance.
More information can be found at:
www.galfan.com

Strength: High tensile steel



Bundles of 200
(special request bundles of 100)

Available in several lengths

1.65m - 5.4 feet

1.8m - 6 feet

2.1m - 7 feet

2.4m - 8 feet

2.7m - 8 feet

OK products are carbon offset at manufacturing — Australian designed & manufactured

Sales Enquiries: +61 (0) 488 662 562

Nigel Catt: nigel@ocloc.com.au

www.ocloc.com.au

